Standard Bidding Document

CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER. (Works)

National

Single Stage-One Envelope

November 15, 2026

Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)),Assistant Manager
6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).
Phone: +92-343-340-8880, Email: farhan.shahid@pidcl.com.pk

Table of Contents

REQUEST FOR BIDS 1

Instructions to Bidders 3

Bid Data Sheet 31

Bids Data Sheet (BDS) 32

Eligibility Criteria 36

Evaluation Criteria 38

Jobs/Lots 38

Related Services : 39

Work Specifications and Market Rates 40

Scope of Work 43

Price Schedule 44

General Conditions of Contract 46

Special Conditions of Contract 56

Bid Securing Declaration 61

Contract Form 63

Integrity Pact 66

Performance Guarantee Form 68

Annexure 71

BOQ 72

DRAWINGS 72

RATE TO BE QOUTED 72

Procurement Forms 73

Additional Forms and Documents 76

REQUEST FOR BIDS

PROCUREMENT OF CIVIL WORKS

1. The **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL))** has reserved Funds for the procurement planned for FY **2026-27**. The **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL))** intends to apply part of the proceeds of this Fund to cover eligible payments under the contract for the "**CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**" with the reference of "**P199059**".

2. The **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL))** invites sealed Bids from eligible Bidders for procurement of Works **(CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.)** described in the bidding documents on **EPADS v2.0**.

3. **Single Stage-One Envelope** will be used by adopting **Least Cost Based Selection (LCBS)** Technique for the subject procurement, in line with the Public Procurement Rules, 2026 and any Regulations, Regulatory Guides, Procurement Guidelines or Instructions issued by the Authority from time to time.

4. All Bids must be accompanied by a Bid Security amount described in Bid Security Section in Bidding Document in the form of **Pay Order, Call at Deposit**. Or all bids must be accompanied by bid securing declaration in the format specified in the Bidding documents

5. E-Bidding documents, containing detailed terms & conditions, specifications and requirements etc. are available on **e-Pak Acquisition and Disposal System (EPADS)** at **https://epads.gov.pk/opportunities/federal/procurements/199059** for all the interested bidders registered on **EPADS v2.0**. Bidders are required to get themselves registered on **EPADS v2.0** to participate in Bidding process.

6. The e-bids, prepared in accordance with the instructions in the e-Bidding documents, must be submitted through **EPADS v2.0** on or before **Friday, November 27, 2026 11:00 AM**. E-bids will be opened by using **EPADS v2.0** on the same day at **Friday, November 27, 2026 11:30 AM**. Manual submission of Bids shall not be entertained. Those vendor who have not yet registered on the new version of **EPADS v2.0**, may register themselves on **https://vendors.epads.gov.pk/**. A tutorial to explain the registeration process is available at **https://www.youtube.com/watch?v=MNW6T38v7tc.**

In terms of Rules 65 of Public Procurement Rules, 2026 Grievance Redressal Committee (GRC) is notified for the subject procurement and notification copy is available on the procuring agency's website and on Authority's website at (**www.ppra.org.pk**).

Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager
6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).
+92-343-340-8880
farhan.shahid@pidcl.com.pk

Instructions to Bidders

A. INTRODUCTION

1. **Scope of Bid**

1.1. The Procuring agency/Employer (PA), as indicated in the Bid Data Sheet (BDS) invites Bids for the execution of Works as specified in the BDS and Section VI- Works Requirements. The name, identification, and number of lots (contracts) of this National/ International Competitive Bidding process are specified in the BDS.

2. **Source of Funds**

2.1. Source of funds as referred in Clause 2 of Bid Data Sheet.

3. **Eligible Bidders**

3.1. A bidder may be natural person, company or firm or public or semi-public agency of Pakistan or any foreign country, or any combination of them with a formal existing agreement (on Judicial Papers) in the form of a joint venture or consortium. In the case of a joint venture or consortium, all members shall be jointly and severally liable for the execution of the Contract in accordance with the terms and conditions of the Contract. The joint venture or consortium shall nominate a Lead Member as nominated in the BDS, who shall have the authority to conduct all business for and on behalf of any and all the members of the joint venture or consortium during the Bidding process, and in case of award of contract, during the execution of contract. Verifiable copy of the agreement that forms a joint venture, consortium or association shall be required to be submitted as part of the Bid.

Any bid submitted by the joint venture, shall indicate the part of proposed contract to be performed by each party and each party shall be evaluated (or post qualified if required) with respect to its contribution only, and the responsibilities of each party shall not be substantially altered without prior written approval of the Procuring Agency and in line with any instructions issued by the Authority.

(The limit on the number of members of JV or Consortium may be prescribed

in BDS, in accordance with the guidelines issued by the PPRA).

3.2. The invitation for bids is open to all prospective bidders subject to any provisions of incorporation or licensing by the respective national/ international incorporating agency or statutory body established for that particular trade or business. Procuring agencies shall specify the registration/licensing requirements for the foreign bidder keeping in view the requirement of that business.

3.3. A Bidder shall not have a conflict of interest. All Bidders found to have a conflict of interest shall be disqualified. A Bidders may be considered to have a conflict of interest with one or more parties in this Bidding process, if they:

3.3.1. are associated or have been associated in the past, directly or indirectly with a firm or any of its affiliates which have been engaged by the Procuring agency/Employer to provide consulting services for the preparation of design or technical specifications of the works that are the subject of the bid; or

3.3.2. have controlling shareholders in common; or

3.3.3. receive or have received any direct or indirect subsidy from any of them; or

3.3.4. have the same legal representative for purposes of this Bid; or

3.3.5. have a relationship with each other, directly or through common third parties, that puts them in a position to have access to information about or influence on the bid of another bidder, or influence the decisions of the Procuring agency/Employer regarding this Bidding process; or

3.3.6. Submit more than one bid in this bidding process.

3.4. A Bidder may be ineligible if –

3.4.1. he is declared bankrupt or, in the case of company or firm, insolvent;

3.4.2. payments in favor of the bidder is suspended in accordance with the judgment of a court of law other than a judgment declaring bankruptcy and resulting (in accordance with the national laws) in the total or partial loss of the right to administer and dispose of its property;

3.4.3. the bidder is convicted, by a final judgment of a Court of Law or relevant Professional Statuary Body, of any offence involving professional conduct;

3.4.4. The bidder is debarred/ blacklisted by a national level Procuring agency/Employer and hence debarred due to involvement in corrupt and fraudulent practices, or performance failure or due to breach of bid securing declaration.

3.5. As and when required, bidders shall provide to the Procuring agency/Employer evidence of their eligibility, proof of compliance with the necessary legal requirements to carry out the contract effectively.

3.6. Bidders shall submit proposal relating to the nature, conditions and modalities of sub-contracting wherever the sub-contracting of any elements of the contract is envisaged.

4. **Eligible Material and Equipment**

4.1. All the material and equipment to be mobilized under the contract shall have their origin in eligible source countries, and all expenditures made under the contract will be limited to such materials and equipment. For this purpose, ineligible countries are stated in the section-IV titled as “Eligible Countries”.

B. BIDDING DOCUMENTS

5. **Contents of Bidding Documents**

5.1. The scope of Works, bidding procedures, and terms and conditions of the contract are prescribed in the bidding documents. In addition to the Invitation for Bids, the bidding documents which should be read in

conjunction with any addenda issued in accordance with ITB 7.1 include:

Section I Instructions to Bidders (ITBs)

Section II Bid Data Sheet (BDS)

Section III Eligible Countries

Section VI Evaluation and Qualification Criteria

Section V Works Requirements Technical Specifications & Schedule of Requirements

Section VI Standard Bidding Forms

Section VII General Conditions of Contract (GCC)

Section VIII Particular Conditions of Contract (PCC)

Section IX Contract Forms

5.2. The bidder is expected to examine all instructions, forms, specifications, terms and conditions prescribed in the bidding documents. Failure to furnish all the information required in the bidding documents will be at the bidder's risk and may result in the rejection of his bid.

6. **Clarification of Bidding Document, Pre-bid Meeting**

6.1. A prospective bidder requiring any clarification of the bidding document may notify the Procuring agency/Employer through EPADS.

6.2. The Procuring agency/Employer shall respond to the request for clarification in accordance with Rule 31 of the Public Procurement Rules 2004.

6.3. Should the Procuring Agency deem it necessary to amend the BIDDING document as a result of a clarification, it shall do so following the procedure under ITB 7.

6.4. If indicated in the BDS, the bidder's designated representative is invited at the bidder's cost to attend a pre-bid meeting at the place, date and time mentioned in the BDS. During this pre-bid meeting, prospective bidders may request clarification of the schedule of requirement, the evaluation criteria or any other aspects of the bidding documents.

6.5. Minutes of the pre-bid meeting, if applicable, including the text of the questions asked by bidders, including those during the meeting (without

identifying the source) and the responses given, together with any responses prepared after the meeting will be uploaded on EPADS. Any modification to the bidding documents that may become necessary as a result of the pre-bid meeting shall be made by the Procuring agency/Employer exclusively through the use of an Addendum pursuant to ITB 7. Non-attendance at the pre-bid meeting will not be a cause for disqualification of a bidder.

6.6. The bidder is advised to visit and examine the Site of Works and its surroundings and obtain for itself on its own responsibility all information that may be necessary for preparing the bid and entering into a contract for construction of the Works. The costs of visiting the Site shall be at the bidder's own expense.

6.7. The bidder and any of its authorized personnel will be granted permission by the Procuring agency/Employer to enter upon its premises and lands for the purpose of such visit, but only upon the express condition that the bidder and its personnel will release and indemnify the Procuring agency/Employer from and against all liability in respect thereof, and will be responsible for death or personal injury, loss of or damage to property, and any other loss, damage, costs, and expenses incurred as a result of the inspection.

7. **Amendment of Bidding Documents**

7.1. The procuring agency may issue notification of any change, addition, modification or deletion in accordance with Rule 23 of the Public Procurement Rules 2004 i.e. Bidding Documents.

7.2. To give prospective bidders reasonable time in which to take an addendum/corrigendum into account in preparing their bids, the Procuring agency/Employer may, at its discretion, extend the deadline for the submission of bids:
Provided that the Procuring agency/Employer shall extend the deadline for submission of bid in pursuance of Rule 27 of the Public Procurement Rules 2004, i.e. Extension of time for submission of bids, if such an addendum is issued within last three (03) days of the bid submission deadline.

C. PREPARATION OF BIDS

8. **Language of Bid**

8.1. The bid prepared by the bidder, as well as all correspondence and documents relating to the bid exchanged by the bidder and the Procuring agency/Employer shall be written in the English language unless specified in the BDS. Supporting documents and printed literature furnished by the bidder may be in another language provided they are accompanied by an accurate translation of the relevant pages in the English language unless specified in the BDS, in which case, for purposes of interpretation of the bidder, the translation shall govern.

9. **Documents Constituting the Bids**

9.1. The Bids prepared by the Bidder shall constitute of all the documents required in the BDS.

10. **Documents Establishing Eligibility of Material, Equipment and Works, their Conformity to Bidding Documents**

10.1. The bid prepared by the bidder shall constitute the following components: -

10.1.1. Documentary evidence established in accordance with ITB 10 that the material and equipment to be utilized by the Bidder for the executions of works are eligible material and equipment and conform to the Bidding Documents;

10.1.2. Documentary evidence established in accordance with ITB 11 that the bidder has been authorized to carry out the Construction works;

10.1.3. Documentary evidence established in accordance with ITB 11 that the bidder is eligible and/or qualified for the subject bidding process;

10.1.4. Form of Bid and Bid Prices completed in accordance with ITB 12 and 13;

10.1.5. Completed schedules as required, including priced Bill of Quantities in accordance with ITB 13.

10.1.6. Technical Proposal completed in all aspects in accordance with ITB-15.

10.1.7. Bid security or Bid Securing Declaration furnished in accordance with ITB 17;

10.1.8. Any other document required in the BDS.

10.2. In addition to the requirements, bids submitted by a JV shall include a copy of the Joint Venture Agreement entered into by all members. Alternatively, a letter of intent to execute a Joint Venture Agreement in the event of a successful bid shall be signed by all members and submitted with the bid, together with a copy of the proposed Agreement.

10.3. The bidder shall furnish, as part of its bid, all those documents establishing the eligibility in conformity to the terms and conditions specified in the bidding documents for all material, equipment and works which the bidder proposes to execute.

10.4. The documentary evidence of conformity of the material, equipment and works to the Bidding Documents may be in the form of literature, drawings, and data, and shall consist of:

10.4.1. a detailed description of the work methodology, approach, schedule and resources to be mobilized at site;

10.4.2. an item-by-item commentary on the Procuring agency/Employer’s Technical Specifications demonstrating substantial responsiveness of the material, equipment and works to those specifications, or a statement of deviations and exceptions to the provisions of the Technical Specifications;

10.4.3. any other procurement specific documentation requirement as stated in the BDS.

10.5. The required documents and other accompanying documents must be in English. In case any other language than English is used the pertinent

translation into English shall be attached to the original version.

11. **Documents Establishing Eligibility and Qualification of the Bidder**

11.1. The bidder shall furnish, as part of its bid, all those documents establishing the bidder's eligibility to participate in the bidding process and/or its qualification to perform the contract if its bid is accepted.

11.2. The documentary evidence of the bidder's eligibility to bid shall establish to the satisfaction of the Procuring agency/Employer that the bidder, at the time of submission of its bid, is from an eligible country as defined in Section-IV titled as "Eligible Countries".

11.3. The documentary evidence of the bidder's qualification to perform the contract if its bid is accepted shall establish to the satisfaction of Procuring agency/Employer that:

11.3.1. The bidder has the financial and technical capability necessary to perform the Contract, meets the qualification criteria specified in Section-V, Evaluation and Qualification Criteria and BDS.

11.3.2. In the case of a bidder not doing business within Pakistan, the bidder is or will be (if awarded the contract) represented by a local bidder (Joint Venture) in accordance with the PEC works bylaws, and in case of award of works such foreign firm is required to participate in the execution of works to carry out its obligations as prescribed in the Conditions of Contract and /or Technical Specifications.

11.3.3. That the bidder meets the qualification criteria listed in Section-V, Evaluation and Qualification Criteria and BDS.

12. **Forms of Bid**

12.1. The Bidder shall fill the Form of Bids furnished in the bidding documents. The Bids Form must be completed without any alterations to its format and no substitute shall be accepted.

13. **Bid Prices**

13.1. The bid prices quoted by the bidder in the Standard bid Forms, Bill of Quantities and in the Price Schedules shall conform to the requirements specified below or exclusively mentioned hereafter in the bidding documents.

13.2. The bidder shall fill in rates and prices for all items of the Works described in the Bill of Quantities. If a Price Schedule shows items listed but not priced, their prices shall be construed to be included in the prices of other items in the Bill of Quantities and will not be paid for separately by the Procuring agency/Employer.

13.3. Items not listed in the Price Schedule shall be assumed not to be included in the bid, and provided that the bid is still substantially responsive in their absence or due to their nominal nature, the corresponding average price of the respective item(s) of the remaining substantially responsive bidder(s) shall be construed to be the price of those missing item(s):
Provided that:

13.3.1. where there is only one (substantially) responsive bidder, or

13.3.2. where there is provision for alternate proposals and the respective items are not listed in the other bids,

The Procuring agency/Employer may fix the price of missing items in accordance with market survey, and the same shall be considered as final price.

13.4. The Bid price to be quoted in the Form of Bid in accordance with ITB 12 shall be the total price of the bid.

13.5. Unless otherwise specified in the BDS and the Contract, the rates and prices quoted by the bidder are subject to adjustment during the performance of the Contract in accordance with the provisions of the Conditions of Contract.

13.6. If so specified in ITB 1.1, bids may be invited for individual lots (contracts) or for any combination of lots (packages).

13.7. Prices quoted by the Bidder shall be fixed during the bidder's performance of the contract and not subject to variation on any account. A bid submitted with an adjustable price will be treated as non-responsive and shall be rejected, pursuant to ITB 27, unless otherwise price adjustment is permissible under Conditions of the Contract.

13.8. All duties, taxes, and other levies payable by the Contractor under the Contract, or for any other cause, as of the date twenty-eight (28) days prior to the deadline for submission of bids, shall be included in the rates and prices and the total bid price submitted by the bidder.

14. **Currencies of Bid and Payment**

14.1. Prices shall be quoted in Pakistani Rupees unless otherwise specified in the BDS. Comparison of bids and tie of bid shall be treated in accordance with the Rule 30(2) of Public Procurement Rules, 2004.

15. **Documents Comprising the Technical Proposal**

15.1. The bidder shall furnish a Technical Proposal including a statement of work methods, equipment, personnel, schedule and any other information as stipulated in Section VII – Standard Bid Forms, in sufficient detail to demonstrate the adequacy of the bidder's proposal to meet the work requirements and the completion time.

16. **Bid Validity Period**

16.1. Bids shall remain valid for the period specified in the BDS after the bid submission deadline prescribed by the Procuring agency/Employer. A bid valid for a shorter period shall be rejected by the Procuring agency/Employer as non-responsive. The period of bid validity will be determined from the complementary bid securing instrument i.e. the expiry period of bid security or bid securing declaration as the case may be.

16.2. Under exceptional circumstances, prior to the expiration of the initial Bids/Bid validity period, the Procuring Agency may request the Bidders' consent to an extension of the period of validity of their Bids/Bid. Such request for extension of the period of bid validity shall be carried out in

accordance with Rule 26 of the Public Procurement Rules, 2004.

17. **Bid Security or Bid Securing Declaration**

17.1. Pursuant to ITB 11.1 unless otherwise specified in the BDS, the bidder shall furnish as part of its bid, a Bid Security in accordance with Rule 25 of the Public Procurement Rules, 2004 in the amount and currency specified in the BDS or Bid Securing Declaration as specified in the BDS in the format provided in Section VII (Standard Bidding Forms).

In case Procuring agency/Employer is inviting bids in lots / packages, the bidder shall be required to submit his bid security against the respective lot/ package for which he is submitting his bid.

Until the development of functionality of auto verification of financial instrument in EPADS, the scanned copy of bid security or bid securing declaration, as the case may be, shall be uploaded on E-PADS whereas the original instrument to be submitted to the procuring agency before closing of bid submission deadline,

17.2. The Bid Security shall be denominated in the local currency or in another freely convertible currency, and it shall be in the form specified in the **BDS** which shall be in any of the following:

17.2.1. A bank guarantee, an irrevocable letter of credit issued by a Scheduled bank in the form provided in the Bidding Documents or another form acceptable to the Procuring agency/Employer and valid for twenty-eight (28) days beyond the end of the validity of the Bid. This shall also apply if the period for Bid Validity is extended. In either case, the form must include the complete name of the bidder;

17.2.2. A cashier’s or certified cheque; or

17.2.3. Another security as indicated in the **BDS**.

17.3. The Bid Security or Bid Securing Declaration shall be in accordance with the Form of the Bid Security or Bid Securing Declaration included in Section VII (Standard Bidding Forms) or another form approved by the Procuring agency/Employer prior to the bid submission.

17.4. The Bid Security shall be payable promptly upon written demand by the Procuring agency/Employer in case any of the conditions listed in ITB 17.9 are invoked.

17.5. Any bid not accompanied by a Bid Security or Bid Securing Declaration in accordance with ITB 17.1 or 17.3 shall be rejected by the Procuring agency/Employer and shall be declared as non-responsive bid, pursuant to ITB 27.

17.6. Unsuccessful bidders' Bid Security will be discharged or returned as promptly as possible, however in no case later than thirty (30) days after the expiration of the period of Bid Validity prescribed by the Procuring agency/Employer pursuant to ITB 16. The Procuring agency/Employer shall make no claim to the amount of the Bid Security, and shall promptly return the Bid Security document, after whichever of the following that occurs earliest:

17.6.1. The expiry of the Bid Security;

17.6.2. The entry into force of a procurement contract and the provision of a performance security (or guarantee), for the performance of the contract if such a security (or guarantee), is required by the Biding documents;

17.6.3. The rejection by the Procuring agency/Employer of all Bids;

17.6.4. The withdrawal of the bid prior to the deadline for the submission of bids, unless the biding documents stipulate that no such withdrawal is permitted.

17.7. The successful bidder's Bid Security will be discharged upon the bidder signing the contract pursuant to ITB 40, or furnishing the performance security (or guarantee), pursuant to ITB 41.

17.8. The Bid Security may be forfeited or the Bid Securing Declaration executed:

17.8.1. if a Bidder:

17.8.1.1. Withdraws its Bid during the period of Bid Validity as specified by the Procuring agency/Employer, and referred by the bidder on the Form of Bid except as provided for in ITB 16.2; or

17.8.2. In the case of a successful bidder, if the bidder fails:

17.8.2.1. to sign the contract in accordance with ITB 40; or

17.8.2.2. to furnish performance security (or guarantee) in accordance with ITB 41.

17.9. In case of Bid Security issued by the foreign bank is allowed by the Procuring agency/Employer, the same should be counter guaranteed by a corresponding bank in Pakistan. Furthermore, in case of joint venture, it should be in the name of Joint venture to ensure joint responsibility. In case the JV is not legally constituted at the time of bid submission, the bid security or bid securing declaration shall be in the names of all future members as named in the letter of bid.

18. **Withdrawal of Bids**

18.1. Before bid submission deadline, any bidder may withdraw, substitute, or modify its bid after it has been submitted by sending a written notice, duly signed by an authorized representative, and the corresponding must accompany the respective written notice.

19. **Format and Signing of Bid**

19.1. The Bidder shall prepare and submit Bids through EPADS with due diligence after carefully reading all the terms and condition before bid submission deadline.

D. SUBMISSION OF BIDS

20. **Submission of Bids through EPADS v2.0**

20.1. All bids shall be submitted through EPADS v2.0.

21. **Deadline for Submission of Bids**

21.1. All bids shall be received through **EPADS v2.0** not later than bid submission deadline as specified in the **BDS**.

21.2. The Procuring agency/Employer may, under exceptional circumstances and at its discretion, extend the deadline for the submission of bids, pursuant to Rule 27 of the Public Procurement Rules, 2004. Extension of Time for submission of bid, by amending the Bidding Documents in accordance with ITB 7, in which case all rights and obligations of the Procuring agency/Employer and bidders previously subject to the deadline will thereafter be subject to the new deadline.

22. **Substitution and Modification of bids**

22.1. A bidder may substitute or modify his bid after it has been submitted, provided that written notice of the substitution or modification of the bid, is received by the Procuring agency/Employer prior to the deadline for submission of bids.

22.2. Revised bid may be submitted after the substitution or modification made in the original bid in accordance with the provisions referred in **ITB 18** .

E. OPENING AND EVALUATION OF BIDS

23. **Opening of Bids**

23.1. The Procuring Agency will open bids in accordance with Rule 28 of the Public Procurement Rules, 2004 and as specified in the BDS.

24. **Confidentiality**

24.1. Information relating to the examination, clarification, evaluation and comparison of bids and recommendation of contract award shall not be disclosed to bidders or any other persons not officially concerned with such

process until the time of the announcement of the respective evaluation report.

25. **Clarification of Bids**

25.1. Clarification of Bidding Documents shall be carried out in accordance with Rule 31 of the Public Procurement Rules, 2004.

25.2. The alteration or modification in the bid which in any case affect the following parameters will be considered as a change in the substance of a bid:

25.2.1. evaluation & qualification criteria;

25.2.2. required scope of work;

25.2.3. contract price;

25.2.4. all securities requirements;

25.2.5. tax requirements;

25.2.6. terms and conditions of bidding documents.

25.2.7. change in the ranking of the bidder

26. **Preliminary Examination of Bids**

26.1. Prior to the detailed evaluation of bids, the Procuring agency/Employer will determine whether each bid:

26.1.1. meets the eligibility criteria defined in **ITB 3** and **ITB 4**;

26.1.2. has been prepared as per the format and contents defined by the Procuring agency/Employer in the bidding documents;

26.1.3. has been properly signed;

26.1.4. is accompanied by the required securities; and

26.1.5. is substantially responsive to the requirements of the bidding documents.

The Procuring agency/Employer's determination of a bid's substantial responsiveness will be based on the contents of the bid itself.

26.2. A substantially responsive Bid is one which conforms to all the terms, conditions, and specifications of the Bidding Documents, without material deviation or reservation. A material deviation or reservation is one that: -

26.2.1. affects in any substantial way the scope, quality, or performance of the Works;

26.2.2. limits in any substantial way, inconsistent with the bidding documents, the Procuring agency/Employer's rights or the bidders' obligations under the Contract; or

26.2.3. if rectified, would affect unfairly the competitive position of other bidders presenting substantially responsive bids.

26.3. The Procuring agency/Employer will confirm that the documents and information specified under ITB 9, 10 and 11 have been provided in the bid. If any of these documents or information is missing, or is not provided in accordance with the Instructions to Bidders, the bid shall be rejected.

26.4. The Procuring agency/Employer may waive-off any minor informality, nonconformity, or irregularity in a bid which does not constitute a material deviation, provided such waiver does not prejudice or affect the relative ranking of any Bidder.

Explanation: A minor informality, non-conformity or irregularity is one that is merely a matter of form and not of substance. It also pertains to some immaterial defect in a Bid or variation of a bid from the exact requirements of the invitation that can be corrected or waived without being prejudicial to other bidders. The defect or variation is immaterial when the effect on quantity, quality, or delivery is negligible when contrasted with the total cost or scope of the works. The Procuring agency/Employer either shall give the bidder an opportunity to cure any deficiency resulting from a minor informality or irregularity in a bid or waive the deficiency, whichever is advantageous to the Procuring agency/Employer. Examples of minor informalities or irregularities include failure of a bidder to –

26.4.1. *Submit the number of copies of signed bids required by the invitation;*

26.4.2. *Furnish required information concerning the number of its employees;*

26.4.3. *the firm submitting a bid has formally adopted or authorized, before the date set for opening of bids, the execution of documents by typewritten, printed, or stamped signature and submits evidence of such authorization and the bid carries such a signature.*

26.5. Provided that a Technical Bid is substantially responsive, the Procuring agency/Employer may request the bidder to submit the necessary information or documentation, within a reasonable period of time, to rectify nonmaterial nonconformities or omissions in the Technical Bid related to documentation requirements. Requesting information or documentation on such nonconformities shall not be related to any such aspect of the technical Proposal linked with the ranking of the bidders. Failure of the bidder to comply with the request may result in the rejection of its bid.

26.6. Provided that a Technical Bid is substantially responsive, the Procuring agency/Employer shall rectify quantifiable nonmaterial nonconformities or omissions related to the Financial Proposal. To this effect, the Bid Price shall be adjusted, for comparison purposes only, to reflect the price of the missing or nonconforming item or component.

26.7. If a bid is not substantially responsive, it will be rejected by the Procuring agency/Employer and may not subsequently be evaluated for complete technical responsiveness.

27. **Examination of Terms and Conditions; Technical Evaluation**

27.1. The Procuring agency/Employer shall examine the bid to confirm that all terms and conditions specified in the **GCC** and the **PCC** have been accepted by the bidder without any material deviation or reservation.
For this purpose:
“Deviation” means departure from the requirements specified in the Bidding

Document.

"Reservation" means setting of limiting conditions or withholding from complete acceptance of the requirements specified in the Bidding Document.

27.2. The Procuring agency/Employer shall evaluate the technical aspects of the bid submitted in accordance with ITB 30, to confirm that all requirements specified in Section VI – Works Requirement, Technical Specifications of the Bidding Documents have been met without material deviation or reservation.

27.3. If after the examination of the terms and conditions and the technical evaluation, the Procuring agency/Employer determines that the bid is not substantially responsive in accordance with ITB 27, it shall reject the bid.

28. **Correction of Arithmetic Errors**

28.1. Bids determined to be substantially responsive will be checked for any arithmetic errors. Errors will be corrected as follows: -

28.1.1. if there is a discrepancy between unit prices and the sub-total price that is obtained by multiplying the unit price and quantity, the unit price shall prevail, and the sub-total price shall be corrected, unless in the opinion of the Procuring agency/Employer there is an obvious misplacement of the decimal point in the unit price, in which the total price as quoted shall govern and the unit price shall be corrected;

28.1.2. if there is an error in a total corresponding to the addition or subtraction of sub-totals, the sub-totals shall prevail, and the total shall be corrected; and

28.1.3. where there is a discrepancy between the amounts in figures and in words, the amount in words will govern.

28.1.4. Where there is discrepancy between grand total of price schedule and amount mentioned on the Form of Bid, the amount referred in Price Schedule shall be treated as correct subject to elimination of other errors.

28.2. The amount stated in the Bid will, be rectified by the Procuring agency/Employer in accordance with the above procedure for the correction of errors and, with, the concurrence of the bidder, shall be considered as binding upon the bidder. If the bidder does not accept the corrected amount, its bid shall be rejected after forfeiture of Bid Security or execution of the Bid Securing Declaration, as the case may be, in accordance with **ITB 41.3**.

29. **Conversion to Single Currency**

29.1. The unit rates and the prices shall be quoted by the bidder entirely in Pak rupees. A bidder expecting to incur expenditures in other currencies for inputs to the Works from outside the Procuring agency/Employer's country (referred to as the "Foreign Currency Requirements") shall indicate the same in the letter of bid-financial proposal. The proportion of the Bid Price (excluding Provisional Sums) needed by him for the payment of such Foreign Currency Requirements either (i) entirely in the currency of the Bidder's home country or, (ii) at the bidder's option, entirely in Pak rupees provided always that a bidder expecting to incur expenditures in a currency or currencies other than those stated in (i) and (ii) above for a portion of the foreign currency requirements, and wishing to be paid accordingly, shall indicate the respective portions in his bid. Comparison of bids quoted in different currencies and conversion of bids into a single currency shall be carried out in accordance with Rule 30(2) of the Public Procurement Rules, 2004**.**

30. **Evaluation of Bids**

30.1. The Procuring agency/Employer shall evaluate and compare only the bids determined to be substantially responsive, pursuant to **ITB 27**.

30.2. In evaluating the Technical Proposal of each Bid, the Procuring agency/Employer shall use the criteria and methodologies listed in the BDS and in terms of works requirement. No other evaluation criteria or methodologies shall be permitted.

30.3. The Procuring agency/Employer's evaluation of a bid will take into account:

30.3.1. the bid price, excluding provisional sums and the provision, if any, for contingencies in the summary bill of quantities, but including day work items, where priced competitively;

30.3.2. converting the amount resulting from applying above, if relevant, to a single currency in accordance with ITB 29;

30.4. The estimated effect of the price adjustment provisions of the Conditions of Contract, applied over the period of execution of the Contract, shall not be taken into account in bid evaluation.

30.5. If these bidding documents allow bidders to quote separate prices for different lots, and the award to a single bidder of multiple lots, the methodology of evaluation to determine the lowest evaluated lot combinations in the Form of Bid, is specified in the **BDS**.

30.6. If the bid, which results in the Evaluated Bid Price (Successful Bid), is seriously unbalanced or front loaded in the opinion of the Employer, the Employer may require the Bidder to produce detailed price analyses for any or all items of the Bill of Quantities, to demonstrate the internal consistency of those prices with the construction methods and schedule proposed. After evaluation of the price analyses, taking into consideration the schedule of estimated Contract payments, the Employer may require that the amount of the performance security be increased at the expense of the Bidder to a level sufficient to protect the Employer against financial loss in the event of default of the successful Bidder under the Contract.

Explanation:

"Unbalanced" or "front-loaded" bids consist of deliberately submitting bids with artificially high prices or unit rates for the early stages of a construction project, offset by artificially low prices or unit rates for the later stages of the project, to improve the contractor's cash flow.

31. **Domestic Preference**

31.1. If the **BDS** so specifies, the Procuring agency/Employer will grant a margin of preference to the domestic contractor in line with the rules, regulations, regulatory guides or instructions issued by the Authority from time to time.

32. **Determination of Successful Bid**

32.1. The Procuring agency/Employer shall compare the evaluated bids in accordance with the predefined bidding procedure, of all substantially responsive bids to determine the Successful bidder.

33. **Qualification of Bidder**

33.1. The Procuring agency/Employer shall determine to its satisfaction whether the bidder is substantially responsive and whose bid is declared as Successful bid either continues to meet (if prequalification applies) or meets (if post-qualification applies) the qualifying criteria specified in Evaluation and Qualification Criteria.
Note: In case of international bidding, the parameters for incorporation or licensing within Pakistan may be fulfilled as part of post qualification.

33.2. The determination shall be based upon an examination of the documentary evidence of the bidder’s qualifications submitted by the bidder, pursuant to **ITB 11**.

33.3. Prior to contract award, the Procuring agency/Employer will verify that the successful bidder (including each member of a JV) is not blacklisted/debarred. The Procuring agency/Employer will conduct the same verification for each sub-contractor proposed by the successful bidder.

34. **Sub-Contractors**

34.1. The bidder shall provide details regarding any specialized sub-contractor to the Procuring agency/Employer. In case change of sub-contractors, the bidder shall promptly notify the Procuring agency/Employer and obtain approval for replacement of sub-contractors.

34.2. Bidders may propose sub-contracting up to the percentage of total value of contracts or the volume of works as specified in the **BDS**.

35. **Abnormally Low Financial Bid**

35.1. A procuring Agency may reject abnormally low bids. The decision of the Procuring agency/Employer to reject a bid and reasons for the decision shall be recorded in the procurement proceedings and promptly communicated to the bidder concerned. Moreover, the Procuring agency/Employer shall not incur any liability solely by rejecting abnormally bid

Guidance for Procuring agency/Employer:

An abnormally low bid means, in the light of the Procuring agency/Employer's estimate and of all the bids submitted, the bid appears to be abnormally low by not providing a margin for normal levels of profit. In order to identify the Abnormally Low Bid (ALB) following approaches can be considered to minimize the scope of subjectivity:

35.1.1. Comparing the bid price with the cost estimate;

35.1.2. Comparing the bid price with the bids offered by other bidders submitting substantially responsive bids; and

35.1.3. Comparing the bid price with prices paid in similar contracts in the recent past either government- or development partner-funded.

35.2. The Procuring agency/Employer will determine to its satisfaction whether the bidder that is selected as having submitted the successful bid is qualified to perform the contract satisfactorily, in accordance with the criteria listed in **ITB 11**

35.3. The determination will take into account the bidder's financial and technical capabilities. It will be based upon an examination of the documentary evidence of the bidder's qualifications submitted by the bidder, pursuant to **ITB 11**, as well as such other information as the Procuring agency/Employer deems necessary and appropriate. Factors not included in these bidding documents shall not be used in the evaluation of the bidders' qualifications.

35.4. Procuring agency/Employer may seek “Certificate for Independent Price Determination” from the bidder and the results of reference checks may be used in determining award of contract.

Explanation: The Certificate shall be furnished by the bidder. The bidder shall certify that the price is determined keeping in view of all the essential aspects such as raw material, its processing, value addition, optimization of resources due to economy of scale, transportation, insurance and margin of profit etc.

35.5. An affirmative determination will be a prerequisite for award of the contract to the bidder. A negative determination will result in rejection of the bidder’s bid, in which event the Procuring agency/Employer will proceed to the next ranked bidder to make a similar determination of that bidder’s capabilities to perform satisfactorily.

F. AWARD OF CONTRACT

36. **Criteria of Award**

36.1. Subject to **ITB 36 and 37**, the Procuring agency/Employer will award the Contract to the bidder whose bid has been determined to be substantially responsive to the bidding documents and who has been declared as Successful Bidder, provided that such bidder has been determined to be:

36.1.1. eligible in accordance with the provisions of **ITB 3**;

36.1.2. is determined to be qualified to perform the Contract satisfactorily; and

36.1.3. Successful negotiations have been concluded, if any.

37. **Negotiations**

37.1. The Committee of the Procuring agency/Employer may negotiate with the Most Advantageous Bidder relating to the following areas:

37.1.1. a minor alteration to the technical (drawings, design technical specifications) details of the statement of works;

37.1.2. Methodology, work plan, staffing in view to streamline the work;

37.1.3. a minor amendment to the Particular conditions of Contract;

37.1.4. finalizing payment arrangements;

37.1.5. clarifying details that were not apparent or could not be finalized at the time of Bidding;

37.2. Where negotiation fails to result into an agreement, the Procuring agency/Employer may invite the next ranked bidder for negotiations. Where negotiations are commenced with the next ranked bidder, the Procuring agency/Employer shall not reopen earlier negotiations.

38. **Procuring agency's Right to reject All Bids**

38.1. The procuring agency has the right to reject all bids in accordance with Rule 33 of the Public Procurement Rules, 2004. However, the Authority (i.e. **PPRA**) may call from the Procuring agency/Employer the justification of those grounds.

39. **Notification of Award**

39.1. The procuring agency shall announce and publish the evaluation result in accordance with Rule 35 of the Public Procurement Rules, 2004.

39.2. Where no complaints have been lodged, the bidder whose bid has been accepted will be notified of the award by the Procuring agency/Employer prior to expiration of the bid validity period through EPADS. However, the Procuring agency/Employer shall not award any procurement contract at least for five (05) days after the announcement of final evaluation report. The notification letter (herein after and in the condition of the contract and contract form called “Letter of Acceptance” will specify the sum that the Procuring agency/Employer will pay the successful bidder in consideration for the execution and completion of the

works as prescribed by the Contract (hereinafter and in the Contract called the "Contract Price).

39.3. The notification of award will constitute the formation of the Contract, subject to the bidder furnishing the Performance Security (or guarantee) in accordance with **ITB 41** and signing of the contract in accordance with **ITB 40**.

39.4. Upon the successful bidder's furnishing of the performance security (or guarantee) pursuant to **ITB 41**, the Procuring agency/Employer will promptly notify each unsuccessful bidder, the name of the successful bidder and the Contract amount and will discharge the Bid Security or Bid Securing Declaration of the bidder(s) pursuant to **ITB 17**.

40. **Signing of Contract**

40.1. Promptly after notification of award, Procuring agency/Employer shall send the successful bidder the draft agreement, incorporating all terms and conditions as agreed by the parties to the contract.

40.2. Immediately after the Redressal of grievance by the **GRC**, and after fulfillment of all conditions precedent of the Contract Form, the successful bidder and the Procuring agency/Employer shall sign the contract.

40.3. Where no formal signing of a contract is required, work order issued to the bidder shall be construed to be the contract.

41. **Performance Security (or Guarantee)**

41.1. After the receipt of the Letter of Acceptance, the successful bidder, within the specified time, shall deliver to the Procuring agency/Employer a Performance Guarantee in the amount and in the form stipulated in the BDS and PCC, denominated in the type and proportions of currencies in the Letter of Acceptance and in accordance with the Conditions of Contract.

41.2. If the Performance Guarantee is provided by the successful bidder and it shall be in the form specified in the BDS which shall be in any of the following:

41.2.1. certified cheque, cashier's or manager's cheque, or bank draft;

41.2.2. irrevocable letter of credit issued by a scheduled bank of Pakistan or in the case of an irrevocable letter of credit issued by a foreign bank, the letter shall be confirmed or authenticated by a scheduled bank of Pakistan;

41.2.3. bank guarantee confirmed by a reputable local bank or, in the case of a successful foreign bidder, bonded by a foreign bank; or

41.2.4. surety bond callable upon demand issued by any reputable surety or insurance company.
Any Performance Guarantee submitted shall be enforceable in Pakistan.

41.3. Failure of the Most Advantageous Bidder to comply with the requirement of **ITB 40** shall constitute sufficient grounds for the annulment of the award and forfeiture of the Bid Security or declare blacklisted (in case bid securing declaration is submitted) in which event the Procuring agency/Employer may make the award to the next most advantageous bidder or reinitiate the procurement process afresh (as a case may be).

42. **Advance Payment**

42.1. Advance payment will be provided to the bidder in percentage and in the manner as agreed by the both parties in terms of Conditions of the Contract.

42.2. The Procuring agency/Employer will provide an advance payment as stipulated in the Conditions of Contract, subject to a maximum amount, as stated and/or Conditions of the Contract. The advance payment request shall be accompanied by an advance payment security (guarantee) in the form provided in Section X. For the purpose of receiving the advance payment, the bidder shall make and estimate of, and include in its bid, the expenses that will relate to the purchase of equipment, machinery, materials, and on the engagement of labor during the first month beginning with the date of the Procuring agency/Employer's "**Notice to Commence**" as specified in the **PCC**.

43. **General Performance of the Bidders**

43.1. The Procuring agency/Employer reserves the right to obtain information regarding performance of the bidders on their previously awarded contracts / works. The Procuring agency/Employer may seek information / report from the previous employer for consideration. However, the Procuring agency/Employer shall incorporate such parameters in the evaluation criteria and accordingly decide the fate of the bid submitted.

44. **Corrupt & Fraudulent Practices**

44.1. Procuring agencies (including beneficiaries of Government funded projects and procurement) as well as Bidders/Suppliers/Contractors under Government financed contracts, observe the highest standard of ethics during the procurement and execution of such contracts, and will avoid to engage in any corrupt and fraudulent practices.

G. GRIEVANCE REDRESSAL & COMPLAINT REVIEW MECHANISM

45. **Grievance Redressal**

45.1. Grievance Redressal shall be carried out in accordance with Rule 48 of the Public Procurement Rules, 2004 i.e. Redressal of grievances by the procuring agency and “Redressal of Grievances Regulations 2021”.

H. MECHANISM OF BLACKLISTING

46. **Mechanism of Blacklisting**

46.1. The Procuring agency/Employer shall proceed Blacklisting of Bidders/Contractors in accordance with Rule 19 of the Public Procurement Rules, 2004 i.e. Blacklisting and “Blacklisting and Debarment of Bidders or Contractors Regulations 2024.

Bid Data Sheet

Bids Data Sheet (BDS)

The following specific data for the procurement of Goods to be procured shall complement, supplement, or amend the provisions in the Instructions to Bidders (ITB). Whenever there is a conflict, the provisions herein shall prevail over those in ITB.

BDS Clause Number	ITB Number	Amendments of, and Supplements to, Clauses in the Instruction to Bidders
A. Introduction		
1	**1.1**	Name of Procuring Agency:**Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL))** The subject of procurement is:**CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.** Expected commencement date: **Friday, January 29, 2027**
2.	**2.1**	Financial year for the operations of the Procuring Agency:**2026-27** Name and identification number of the Contract: **P199059**
3.	**3.1**	JV/Consortium or AssociationAllowed: **No** Number of JV/Consortium Members: **Nil**
B. Bidding Documents		

4.	**6.2 & 6.4**	The Bidders may seek clarifications through **EPADS v2.0**: Clarification Date: Tuesday, November 24, 2026 Pre-Bid Meeting: Tuesday, November 17, 2026 11:00 AM Venue: 6th Floor, Ext Block, Bahria Complex-VI, Gizri.
5.	**7.2**	Any addendum, in case issued, shall be published on **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL))** website and on **EPADS v2.0**.
C. Preparation of Bids		
6.	**8.1**	List of documents required along with the bid: No
7.	**9.1**	The qualification criteria to establish the supply / production capability of the bidder. *see Eligibility Criteria*
8.	**11.2**	**Works and Their relateddocuments:** *See section Required Scope of Work*
9.	**11.1**	Price schedule will be provided according to the format defined and acquired. *see section price schedule.*
10.	**11.4**	**Specifications:** *see section of specifications.*

11.	**11.5 & 13.5**	The price shall be **Fixed**. The bid price shall be adjusted in accordance with Appendix provided – Formula for Price Adjustment.
12.	**14.1**	Currency of the Bids shall be : **PKR**
13.	**16.1**	The Bids/Bid Validity period shall be: **90 Days**
14.	**17.1**	The amount of Bid Security shall be as defined in Bid Security Section for items and lots given in **BDS 6**
15.	**17.2**	The Bid Security shall be in the form of: **Pay Order, Call at Deposit**
16.	**15.1**	Alternative Bids to the requirements of the bidding documents willnot be permitted.

D. Submission of Bids

17.	**18.1 & 21.1**	Bid shall be submitted online on EPADS v2.0 whereas hard copy of the bid security should be submitted to the following; **6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).** Bids that are not submitted on EPADS v2.0 shall be disqualified. The deadline for Bids submission is: **Friday, November 27, 2026 11:00 AM**

E. Opening and Evaluation of Bids

18.	**24.1**	The Bids opening shall take place on **EPADS v2.0**. Day *: **Friday*** Date:***November 27, 2026*** Time *: **11:30 AM***
19.	**30.2**	Selection technique adopted will be: **Least Cost Based Selection (LCBS)** *see Evaluation Criteria*

F. Award of Contract

20.	**41.1 & 41.2**	The Performance guarantee shall: **10.00%**. The Performance Guarantee shall be acceptable in the form of:**Bank Guarantee**
21.	**45.1**	Arbitrator shall be appointed by mutual consent of the both parties.

G. Review of Procurement Decisions

22.	**37**	Grievance against this procurement shall be submitted online on EPADS v2.0.

Eligibility Criteria

All Active Taxpayers shall be eligible to participate in the procurement process, unless expressly excluded or otherwise restricted under the Eligibility Criteria specified by the Procuring Agency.

Required Registration
NADRA CITIZENSHIP (CNIC/NICOP) FBR (NTN)

Eligibility Criteria	Document
Valid/Active registration with PEC 2027 in category C-4 or above with appropriate codes	Yes
Valid/Active Electrical Liscence of Sindh Region.(For Electric Works).	Yes
Valid /Active Registration with SRB.	Yes
Income Tax return of last 03 years.	Yes
Fresh affidavits (E stamp paper) with effect that 1. All documents/particulars/ information provided are true and correct. In case of bogus/tempered or false information/ certificates produce by the company/firm shall be liable to be black listed at any stage. 2. The firm is not involved in any kind of litigation with any departmental rift, abandoned or necessary delay incompletion of any work. 3. The firm/contractor have not been black listed previously by any executing agency.	Yes
At least Two General Works having General Nature & Two Similar works having same nature, equal or more cost completed (Work Order & Completion Certificate) during the past Five (05) years from date of Bid Opening, The Contractors shall provide Work Order & Completion Certificate.	Yes

The Annual Audit Reports for the Last three Years having Average TurnOver equal or graeter than 50% of the Respective Work Amount duly certified by the Chartered Accounts/Bank.	Yes
The Bank Account Line(s) of credits Certificate indicating the soundness of the Applicants Financial Position of Amount Equals to the 40% of the Bid Amount of the Respective Work.	Yes
ISO Certifications for 9001, 14001, & 45001.	Yes

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Evaluation Criteria

Least Cost Based Selection (LCBS)

Jobs/Lots

Jobs Without Lots :

Job	Delivery Schedule	Quantity	Bid Security
CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.	Address: 6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province). Schedule: 180 Days Quantity: 3092/sqft	3092/sqft	3000000 PKR

Related Services :

No

Work Specifications and Market Rates

Jobs Without Lots :

Job: CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.

Specifications / Requirements:

Sr. No	Ref. No.	Description	Unit	Qty	Rate	Amount
1		CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.				
2	1	SH-I:BUILDING				
3	2	SH-II:BUILDING FF				

Sr. No	Ref. No.	Description	Unit	Qty	Rate	Amount
4	3	SH-III Second Floor (including Security Post)				
5	4	SH-IV Parapet Wall				
6	5	SH-V UGT				
7	6	SH-VI OHT				
8	7	SH-VII Guard Room & Driver room				
9	8	SH-VIII W/S & S/I				
10	9	SH-IX Compound Wall				
11	10	SH-X Parking Shed				
12	11	SH-XI Earth Filling (outer side of building)				

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Sr. No	Ref. No.	Description	Unit	Qty	Rate	Amount
13	12	SH-XII SOIL INVESTIGATION				
14	13	SH-XIII Electrification / Gas (Internal / External) & Allied works				
15		TOTAL:				62687190
					GRAND TOTAL:	Rs62,687,190.00

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Scope of Work

Building works

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Price Schedule

For Individual Jobs

#	Job Title	Quantity	Unit Price (PKR)	Total Price (PKR)	Delivery Location	Delivery Period / Year	Country of Origin
1							
2							

For Lots

#	Lot Title	Total Lot Price (PKR)	Country of Origin
1	[Lot 1 Title]		

PUBLIC PROCUREMENT REGULATORY AUTHORITY
(PPRA)
EPADS

General Conditions of Contract

A. General

1. **Definitions**

1.1. Unless the context otherwise requires, the following terms whenever used in this Contract shall have the same meaning and shall be interpreted as indicated

1.1.1. “Applicable Law” means the laws and any other instruments having the force of law in the Government’s Country, or in such other country as may be specified in the Special Conditions of the Contract (SC), as they may be issued and in force from time to time;

1.1.2. “The Contract” means an agreement enforceable by law;

1.1.3. “The Contract Price” means the price payable to the Contractor under the Contract for the full and proper performance of its contractual obligations;

1.1.4. “The Services” means the work to be performed by the Contractor pursuant to this Contract and as prescribed in the Specifications and Schedule of Activities included in the Contractor’s Bid;

1.1.5. “Ancillary Services” means those services ancillary to the provision of Services, such as transportation and insurance, and any other incidental services, such as installation, commissioning, provision of technical assistance, training, and other such obligations of the Contractor covered under the Contract;

1.1.6. “GCC” means the General Conditions of Contract contained in this section;

1.1.7. “SCC” means the Special Conditions of Contract by which the GCC may be amended or supplemented;

1.1.8. **“**Day” means calendar day unless indicated otherwise;

1.1.9. “Effective Date” means the date on which this Contract comes into force and effect;

1.1.10. “The Contractor” means the individual or corporate body whose Bids to provide the Services has been accepted by the Procuring Agency;

1.1.11. “The Project Site,” where applicable, means the place or places named in Bid Data Sheet and technical Specifications;

1.1.12. “Government” means the Government of Pakistan;

1.1.13. “Local Currency” means the currency of Pakistan;

1.1.14. “In Writing” means communicated in written form with proof of receipt;

1.1.15. “Completion Date” means the date of completion of the Services by the Contractor as certified by the Procuring Agency;

1.1.16. “Foreign Currency” means any currency other than the currency of the country of the Procuring Agency;

1.1.17. “Party” means the Procuring Agency or the Contractor, as the case may be, and “Parties” means both of them;

1.1.18. "Service" means any object of procurement other than goods or works;

1.1.19. “Subcontractor” means any entity to which the Bidder subcontracts any part of the Services.

2. **Applicable Law**

2.1. The contract shall be governed and interpreted in accordance with the laws of Pakistan, unless otherwise specified in SCC.

3. **Language**

3.1. The Contract as well as all correspondence and documents relating to the Contract exchanged between the Contractorand the Procuring Agency, shall be written in the **English language** unless otherwise stated in the **SCC** . Supporting documents and printed literature that are part of the Contract may be in another language provided these are accompanied by an accurate translation of the relevant passages in English, in which case, for purposes of interpretation of the Contract, this translation shall govern.

4. **Notices**

4.1. Any notice, request, or consent made pursuant to this Contract shall be in writing and shall be deemed to have been made when delivered in person to an authorized representative of the Party to whom the communication is addressed, or when sent by registered mail, telex, telegram, or facsimile to such Party at the address specified in the **SCC**.

5. **Location**

5.1. The Services shall be performed at such locations as the Procuring Agency may approve and as specified in **SCC.**

5.2. A {DOCUMENTS}

6. **Authorized Representatives / Authority of Member in charge**

6.1. Any action required or permitted to be taken, and any document required or permitted to be executed, under this Contract by the Procuring Agency or the Contractor may be taken or executed by the officials specified in the **SCC**.

B. Commencement, Completion, Modification, and Termination of Contract

7. **Effectiveness of Contract**

7.1. This Contract shall come into effect on the date the Contract is signed by both parties and such other later date as may be stated in the **SCC.**

8. **Commencement of Services**

8.1. The Contractor shall confirm availability of Key Experts and begin carrying out the Services not later than the number of days after the Effective Date specified in the **SCC.**

9. **Program schedule**

9.1. Before commencement of the Services, the Contractor shall submit to the Procuring Agency for approval a Program showing the general methods, arrangements, order and timing for all activities. The Services shall be carried out in accordance with the approved Program as updated.

10. **Starting Date/Expiration Date**

10.1. The Contractor shall start carrying out the Services Five (05) days after the date the Contract becomes effective, or at such other date as may be specified in the **SCC.**

10.2. Unless terminated earlier pursuant to Clause **GCC 14** hereof, this Contract shall expire at the end of such time period after the Effective Date as specified in the **SCC.**

11. **Entire Agreement**

11.1. This Contract contains all covenants, stipulations and provisions agreed by the Parties. No agent or representative of either Party has authority to make, and the Parties shall not be bound by or be liable for, any statement, representation, promise or agreement not set forth herein.

12. **Modification**

12.1. Any modification or variation of the terms and conditions of this Contract, including any modification or variation of the scope of the Services, may only be made by written agreement between the Parties. However, each Party shall give due consideration to any modification(s) or variation(s) made by the other Party.

12.2. In cases of any modification(s) or variation(s), the prior written consent of the Procuring Agency is required.

13. **Force Majeure**

13.1. **Definition**

For the purposes of this Contract, “Force Majeure” means an event which is beyond the reasonable control of a Contractor and which makes a Contractor’s performance of its obligations under the Contract impossible or so impractical as to be considered impossible under the circumstances.

13.2. **No Breach of Contract**

The failure of a Party to fulfill any of its obligations under the contract shall not be considered to be a breach of, or default under, this Contract in so far as such inability arises from an event of Force Majeure, provided that the Party affected by such an event (a) has taken all reasonable precautions, due care and reasonable alternative

measures in order to carry out the terms and conditions of this Contract, and (b) has informed the other Party as soon as possible about the occurrence of such an event.

13.3. **Extension of Time**
Any period within which a Contractor shall, pursuant to this Contract, complete any action or task, shall be extended for a period equal to the time during which such Party was unable to perform such action as a result of Force Majeure.

13.4. **Payments**
During the period of their inability to perform the Services as a result of an event of Force Majeure, the Contractor shall be entitled to continue to be paid under the terms of this Contract, as well as to be reimbursed for additional costs reasonably and necessarily incurred by them during such period for the purposes of the Services and in reactivating the Service after the end of such period.

14. **Termination**

14.1. **By the Procuring Agency**
The Procuring Agency may terminate this Contract in case of the occurrence of any of the events specified in paragraphs (a) through (e) of this Clause. In such an occurrence the Procuring Agency shall give at least thirty (30) calendar days' written notice of termination to the Contractor in case of the events referred to in (a) through (d); at least sixty (60) calendar days' written notice in case of the event referred to in (e);

14.1.1. If the Contractor fails to remedy a failure in the performance of its obligations hereunder, as specified in a notice of suspension;

14.1.2. If the Contractor becomes (or, if the Contractor consists of more than one entity, if any of its members becomes) insolvent or bankrupt or enter into any agreements with their creditors for relief of debt or take advantage of any law for the benefit of debtors or go into liquidation or receivership whether compulsory or voluntary;

14.1.3. If the Contractor fails to comply with any final decision reached as a result of arbitration proceedings;

14.1.4. If, as the result of Force Majeure, the Contractor is unable to perform a material portion of the Services for a period of not less than sixty (60) calendar days;

14.1.5. If the Procuring Agency, in its sole discretion and for any reason whatsoever, decides to terminate this Contract;

14.2. **By the Contractor**
The Contractor may terminate this Contract, by not less than thirty (30) calendar days' written notice to the Procuring Agency, in case of the occurrence of any of the events specified in paragraphs (a) through (d) of this Clause.

14.2.1. If the Procuring Agency fails to pay any money due to the Contractor pursuant to this Contract and not subject to dispute within forty-five (45) calendar days after receiving written notice from the Contractor that such payment is overdue;

14.2.2. If, as the result of Force Majeure, the Contractor is unable to perform a material portion of the Services for a period of not less than sixty (60) calendar days;

14.2.3. If the Procuring Agency fails to comply with any final decision reached as a result of arbitration;

14.2.4. If the Procuring Agency is in material breach of its obligations pursuant to this Contract and has not remedied the same within forty-five (45) days (or such longer period as the Bidder may have subsequently approved in writing) following the receipt by the Procuring Agency of the Contractor's notice specifying such breach.

C. Obligations of the Contractor

15. **General**

15.1. **Standard of Performance**

15.1.1. The Contractor shall perform the Services and carry out the Services with all due diligence, efficiency and economy, in accordance with generally accepted professional standards and practices, and shall observe sound management practices, and employ appropriate technology and safe and effective equipment, machinery, materials and methods. The Contractor shall always act, in respect of any matter relating to this Contract or to the Services, as a faithful adviser to the Procuring Agency, and shall at all times support and safeguard the Procuring Agency's legitimate interests in any dealings with the third parties;

15.1.2. The Contractor shall employ and provide such qualified and experienced Experts and Sub-Contractors as are required to carry out the Services.

15.2. **Law Applicable to Services**

The Contractor shall perform the Services in accordance with the Contract and in accordance with the Law of Pakistan and shall take all practicable steps to ensure that any of its Experts and Sub-Bidders, comply with the Applicable Law.

16. **Conflict of Interests**

16.1. **Contractor Not to Benefit from Commissions and Discounts**

The remuneration of the Contractor shall constitute the Contractor's sole remuneration in connection with this Contract or the Services, and the Contractor shall not accept for their own benefit any trade commission, discount, or similar payment in connection with activities pursuant to this Contract or to the Services or in the discharge of their obligations under the Contract, and the Contractor shall use their best efforts to ensure that the Personnel, any Subcontractors, and agents of either of them similarly shall not receive any such additional remuneration.

16.2. **Contractor and Affiliates Not to be Otherwise Interested in Project**

The Contractor agree that, during the term of this Contract and after its termination, the Contractor and its affiliates, as well as any Subcontractor and any of its affiliates, shall be disqualified from providing Services (other than the Services and any continuation thereof) for any project resulting from or closely related to the Services.

16.3. **Prohibition of Conflicting Activities**
Neither the Bidder nor its Subcontractors nor the Personnel shall engage, either directly or indirectly, in any of the following activities:

16.3.1. during the term of this Contract, any business or professional activities in the Government's country which would conflict with the activities assigned to them under this Contract;

16.3.2. during the term of this Contract, neither the Contractor nor their Subcontractors shall hire public employees in active duty or on any type of leave, to perform any activity under this Contract;

16.3.3. after the termination of this Contract, such other activities as may be specified in the **SCC.**

17. **Insurance to be Taken Out by the Contractor**

17.1. The Contractor(a) shall take out and maintain, and shall cause any Subcontractors to take out and maintain, at its (or the Sub-contractors', as the case may be) own cost but on terms and conditions approved by the Procuring Agency, insurance against the risks, and for the coverage, as shall be specified in the **SCC**; and (b) at the Procuring Agency's request, shall provide evidence to the Procuring Agency showing that such insurance has been taken out and maintained and that the current premiums have been paid.

18. **Contractor's Actions Requiring Procuring Agency's Prior Approval**

18.1. The Contractor shall obtain the Procuring Agency's prior approval in writing before taking any of the following actions:

18.1.1. appointing such members of the Personnel not provided by the Contractor;

18.1.2. changing the Program of activities; and

18.1.3. any other action that may be specified in the **SCC.**

19. **Reporting Obligations**

19.1. The Contractor shall submit to the Procuring Agency the reports and documents in the numbers, and within the periods as prescribed by the Procuring Agency.

20. **Liquidated Damages**

20.1. **Payments of Liquidated Damages**
The Contractor shall pay liquidated damages to the Procuring Agency at the rate per day stated in the **SCC** for each day that the Completion Date is later than the Intended Completion Date. The total amount of liquidated damages shall not exceed the amount defined in the **SCC**. The Procuring Agency may deduct liquidated damages from payments due to the Contractor. Payment of liquidated damages shall not affect the Contractor's liabilities.

20.2. **Correction for Over-payment**
If the Intended Completion Date is extended after liquidated damages have been paid, the Procuring Agency shall correct any overpayment of liquidated damages by the Contractor by adjusting the next payment certificate. The

Contractor shall be paid interest on the overpayment, calculated from the date of payment to the date of repayment, at the rates specified in **SCC.**

20.3. **Lack of performance penalty**
If the Contractor has not corrected a Defect within the time specified in the Procuring Agency's notice, a penalty for Lack of performance will be paid by the Contractor. The amount to be paid will be calculated as a percentage of the cost of having the Defect corrected, assessed as specified in the Contractor

21. **Performance Guarantee**

21.1. Within the time stipulated in the acceptance letter from the Procuring Agency, the successful Bidder shall furnish the Performance Guarantee in shape and amount **specified in SCC.**

21.2. The proceeds of the Performance Guarantee shall be payable to the Procuring agency as compensation for any loss resulting from the Supplier's failure to complete its obligations under the Contract.

21.3. The Performance Guarantee shall be denominated in the currency of the Contract, or in a freely convertible currency acceptable to the Procuring agency and shall be in the acceptable form as specified in **SCC**.

21.4. The Performance Guarantee will be discharged by the Procuring agency and returned to the Supplier not later than thirty (30) days following the date of completion of the Supplier's performance obligations under the Contract, including any warranty obligations, unless otherwise **specified in SCC.**

22. **Sustainable Procurement**

22.1. The Contractor shall conform to the sustainable procurement contractual provisions, if and as specified in the **SCC.**

D. Contractor's Personnel

23. **Description of Personnel**

23.1. The titles, agreed job descriptions, minimum qualifications, and estimated periods of engagement in the carrying out of the Services of the Contractor's Key Personnel. The Key Personnel listed by title as well as by name are hereby approved by the Procuring Agency.

24. **Removal and / or Replacement of Personnel**

24.1. Except as the Procuring Agency may otherwise agree, no changes shall be made in the Key Personnel. If, for any reason beyond the reasonable control of the Contractor, it becomes necessary to replace any of the Key Personnel, the Contractor shall provide as a replacement a person of equivalent or better qualifications.

24.2. If the Procuring Agency finds that any of the Personnel have (i) committed serious misconduct or have been charged with having committed a criminal action, or (ii) have reasonable cause to be dissatisfied with the performance of any of the Personnel, then the Contractor shall, at the Procuring Agency's written request specifying the grounds thereof, provide as a replacement a person with qualifications and experience acceptable to the Procuring Agency.

24.3. The Contractor shall have no claim for additional costs arising out of or incidental to any removal and/or replacement of Personnel.

E. Obligations of the Procuring Agency

25. **Change in the Applicable Law**

25.1. If, after the date of this Contract, there is any change in the Applicable Law with respect to taxes and duties which increases or decreases the cost of the Services rendered by the Contractor, then the remuneration and reimbursable expenses otherwise payable to the Contractor under this Contract shall be increased or decreased accordingly by agreement between the Parties, and corresponding adjustments shall be made to the amounts referred in the **SCC.**

26. **Services and Facilities**

26.1. The Procuring Agency shall make available to the Contractor and the Experts, for the purposes of the Services and free of any charge, the services, facilities and property described in the Terms of Reference, at the times and in the manner specified in the Terms of Reference.

26.2. In case that such services, facilities and property shall not be made available to the Contractor, the Parties shall agree on (i) any time extension that it may be appropriate to grant to the Contractor for the performance of the Services, (ii) the manner in which the Contractor shall procure any such services, facilities and property from other sources, and (iii) the additional payments, if any, to be made to the Contractor as a result thereof.

F. Payments to the Contractor

27. **Contract Price**

27.1. The price payable shall be in Pakistani Rupees unless otherwise specified in the **SCC**.

28. **Terms and Conditions of Payment**

28.1. Payments will be made to the Contractor according to the payment schedule stated in the **SCC** and as per actual invoice submitted by the Contractor.

28.2. Unless otherwise stated in the **SCC**, the advance payment shall be made against the provision by the Contractor of a bank guarantee for the same amount, and shall be valid for the period stated in the **SCC.** Any other payment shall be made after the conditions listed in the **SCC** for such payment have been met, and the Contractor have submitted an invoice to the Procuring Agency specifying the amount due.

29. **Quality Control Identifying Defects**

29.1. The principle and modalities of Inspection of the Services by the Procuring Agency shall be as indicated in the **SCC.** The Procuring Agency shall check the Contractor’s performance and notify him of any Defects that are

found. Such checking shall not affect the Contractor's responsibilities. The Procuring Agency may instruct the Contractor to search for a Defect and to uncover and test any service that the Procuring Agency considers may have a Defect. Defect Liability Period is as defined in the **SCC**.

29.2. A {INSPECTION}

30. **Correction of Defects, and Lack of Performance Penalty**

30.1. The Procuring Agency shall give notice to the contractor of any Defects before the end of the Contract. The Defects liability period shall be extended for as long as Defects remain to be corrected.

30.2. Every time notice a Defect is given; the contractor shall correct the notified Defect within the length of time specified by the Procuring Agency's notice.

30.3. If the contractor has not corrected a Defect within the time specified in the Procuring Agency's notice, the Procuring Agency will assess the cost of having the Defect corrected, the contractor will pay this amount, and a Penalty for Lack of Performance.

31. **Settlement of Disputes Amicable Settlement**

31.1. The Parties shall use their best efforts to settle amicably all disputes arising out of or in connection with this Contract or its interpretation.

32. **Dispute Settlement**

32.1. **Arbitration**

If any dispute of any kind whatsoever shall arise between the procuring agency and the contractor in connection with or arising out of the Contract, including without prejudice to the generality of the foregoing, any question regarding its existence, validity or termination, or the execution of the contract, the parties shall seek to resolve any such dispute or difference by mutual consultation. If the parties fail to resolve such a dispute or difference even after negotiations or mediation, then the dispute shall be referred within fourteen (14) days in writing by either party to the Arbitrator, with a copy to the other party.

Any dispute in respect of which a notice of intention to commence arbitration has been given, in accordance with **GCC sub-clause 32.1**, shall be finally settled by arbitration. Arbitration may be commenced prior to or after completion of the Contract. Arbitration proceedings shall be conducted in accordance with Arbitration Act 1940. Notwithstanding any reference to arbitration herein, the parties shall continue to perform their respective obligations under the Contract unless otherwise agreed. The Procuring Agency shall continue to pay the Contractor any undisputed amounts due under the Contract during the resolution of any dispute.

Special Conditions of Contract

SECTION VIII. SPECIAL CONDITIONS OF CONTRACT

The following Special Conditions of Contract shall supplement the General Conditions of Contract. Whenever there is a conflict, the provisions herein shall prevail over those in the Conditions of Contract. The corresponding clause number of the GCC is indicated in parentheses.

Number of GC Clause

Amendments of, and Supplements to, Clauses in the General Conditions of Contract

Number of GC Clause 1

Definitions

The Procuring Agency is: Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager 6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).

The Supplier is:

The title of the subject procurement is: CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.

Number of GC Clause 2

Applicable/Governing Law:

The Contract shall be interpreted in accordance with the laws of Islamic Republic of Pakistan

Number of GC Clause 3

Language:

The language of the Contract, all correspondence and communications to be given, and all other documentation to be prepared and supplied under the Contract shall be in **English.**

Number of GC Clause 4

Notices:

The addresses for the notices are:

Procuring Agency:

Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager
6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).
+92-343-340-8880
farhan.shahid@pidcl.com.pk

Contractor/ Bidder:

[Name, address and telephone number]

The Contractor/ Bidder's Representative(s)

[Name, address, telephone number and e-mail address]

Number of GC Clause 6.1

The Authorized Representatives are:

For the Procuring Agency:

Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager
6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).
+92-343-340-8880
farhan.shahid@pidcl.com.pk

For the Bidder:

Name: ……

Designation: ……..

Address: ……..

Number of GC Clause 7

Effectiveness of the contract

The Contractor/Bidder shall be effective within ….. days from the date of signature of the Contract by both parties

Number of GC Clause 8

Commencement of Contract:

The Contractor/Bidder shall provide Non-Consultancy Services from the effective date of contract.

Number of GC Clause 10.2

Expiration of Contract:

The time period shall be ……

Number of GC Clause 14

Termination

In the event of termination of the contract due to any reason as already defined in the General Conditions of Contract, the Bidder shall be responsible for providing to the Authority the Goods till the time of alternate arrangements.

Number of GC Clause 16

Conflict of Interest:

The Procuring Agency reserves the right to determine on a case-by-case basis whether the Bidder should be disqualified from providing goods or services due to a conflict of a nature described in Clause GCC 17.

Number of GC Clause 20

Liquidated Damages

If the Bidder fails to provide services as required under the contract or in case of any data loss/data breach or any incident compromising the data security or other such failures related to any services, the Bidder shall pay to the Procuring Agency as Liquidated Damages at a rate of **0.10%** to **1.00%** of the Contract value, in accordance with the extent of performance failure & the cost of investigating such incidents as judged by the Authority.

Number of GC Clause 21

Performance Guarantee:

The amount of performance guarantee shall be **10.00%** of the contract price in acceptable form of **Bank Guarantee**

Number of GC Clause 27

Currency of Payment:

All the payment to be released to the contractor/Bidder shall be in Pakistani Rupees.

Number of GC Clause 28

Payment terms:

Payment will be made to the Bidder against the procured Goods and services according to the actual invoice or running bills submitted by the Bidder against the services provided within the time given in the conditions of the contract.

Number of GC Clause 29

Identifying Defects:

The Authority reserves the right at any time to inspect the premises of the provider to inspect the goods and monitor the goods being provided.

Inspections & Tests Requirements

For being Brand New, bearing relevant reference numbers of the equipment (Certificate from supplier)

For Physical Fitness having No Damages (Certificate from supplier)

For the Country of Origin as quoted by the Supplier (Certificate from manufacturer)

For conformance to specifications and performance parameters, through Prior to delivery inspection (Inspection Report by Procurement Committee / Inspection Team)

For successful operation at site after complete installation, testing and commissioning of the equipment (Installation, Testing and Commissioning Report by Procurement Committee / Inspection Team)

Delivery & Documents

Copies of the Supplier’s invoice showing Goods’ description, quantity, unit price, and total amount;

Original and two copies of the usual transport document (for example, a negotiable bill of lading, a non-negotiable sea waybill, an inland waterway document, an air waybill, a railway consignment note, a road consignment note, or a multimodal transport document) which the buyer may require to take the goods;

Copies of the packing list identifying contents of each package;

Insurance Certificate;

Manufacturer’s or Supplier’s Valid Warranty Certificate;

Inspection Certificate issued by the Nominated Inspection Agency (if any), and the Supplier’s Factory Inspection Report;

Certificate of Origin.

The above documents would be required even if the equipment has already been imported and is available with the supplier ex-stock

Number of GC Clause 31

Following is the guidance for Dispute Resolution

i. If any dispute of any kind whatsoever shall arise between the Authority and the Bidder in connection with or arising out of the Contract... (full clause unchanged)

ii. At future of negotiation the dispute shall be resolved through mediation...

iii. At failure of mediation, arbitration under Arbitration Act 1940...

iv. Cost sharing equally...

v. Proceedings may commence before/after completion...

Notwithstanding any reference to the arbitration herein, the parties shall continue to perform their respective obligations under the Contract.

Rules of procedure for arbitration proceedings:

Any dispute between the Authority and a Bidder shall be referred to arbitration under the laws of Pakistan including Arbitration Act 1940.

Place of Arbitration and Award:

The arbitration shall be conducted in English language and place shall be Islamabad. The award shall be final and binding.

Bid Securing Declaration

Form 9: Bid Securing Declaration

Date: *[insert date (as day, month and year)]*

Bid No.:***P199059***

To: **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager 6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).**

We, the undersigned, declare that:

We understand that, according to your conditions, Bids must be supported by a Bid Securing Declaration.

We accept that we will be blacklisted and henceforth cross debarred for participating in respective category of public procurement proceedings for a period of (not more than) six months, if fail to abide with a bid securing declaration, however without indulging in corrupt and fraudulent practices, if we are in breach of our obligation(s) under the Bid conditions, because we:

1. have withdrawn or modified our Bid during the period of Bid Validity specified in the Form of Bid;

2. Disagreement to arithmetical correction made to the Bid price; or

3. having been notified of the acceptance of our Bid by the Procuring Agency during the period of Bid Validity, (i) failure to sign the contract if required by Procuring Agency to do so or (ii) fail or refuse to furnish the Performance Security or to comply with any other condition precedent to signing the contract specified in the Bidding Documents.

We understand this Bid Securing Declaration shall expire if we are not the successful

Bidder, upon the earlier of (i) our receipt of your notification to us of the name of the successful Bidder; or (ii) twenty-eight (28) days after the expiration of our Bid.

Contract Form

SECTION IX: CONTRACT FORMS

THIS AGREEMENT made the _____ day of _____ 20_____ between **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager 6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).**

(hereinafter called "the Procuring Agency") of the one part and *[name of Bidder]* of *[city and country of Bidder]* (hereinafter called "the Bidder") of the other part:

WHEREAS the Procuring Agency invited Bids for provision of goods, viz., **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER. (*P199059*)** and has accepted a Bids by the Bidder for the provision of Goods in the sum of *[contract price in words and figures]* (hereinafter called "the Contract Price").

NOW THIS CONTRACT WITNESSETH AS FOLLOWS:

1. In this Contract words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract referred to.

2. The following documents shall be deemed to form and be read and construed as part of this Contract, In the event of any ambiguity or conflict between the Contract Documents listed below, the order of precedence shall be the order in which the Contract Documents are listed below:-

1. This form of Contract;
2. the Form of Bids and the Price Schedule submitted by the Bidder;
3. the Schedule of Requirements;
4. the Technical Specifications;
5. the Special Conditions of Contract;
6. the General Conditions of the Contract;
7. the Procuring Agency's Letter of Acceptance; and
8. [*add here: any other documents*]

3. In consideration of the payments to be made by the Procuring Agency to the Bidder as hereinafter mentioned, the Bidder hereby covenants with the Procuring Agency to provide the Goods related services and to remedy defects therein in conformity in all respects with the provisions of the Contract.

4. The Procuring Agency hereby covenants to pay the Bidder in consideration of the provision of Goods and the remedying of defects therein, the Contract Price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.

IN WITNESS whereof the parties hereto have caused this Contract to be executed in accordance with their respective laws the day and year first above written.

Signed, sealed, delivered by _____the _____ (for the Procuring Agency)

Witness to the signatures of the Procuring Agency:

……

Signed, sealed, delivered by _____the _____ (for the Procuring Agency)

Witness to the signatures of the Bidder: ……

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Integrity Pact

Integrity Pact

DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC. PAYABLE BYTHE SUPPLIERS OF GOODS, SERVICES & WORKS IN CONTRACTS WORTH RS.10.00 MILLION OR MORE

Contract Number: Contract Value: Contract Title:

Dated:

[Name of Supplier] hereby declares that it has not obtained or induced the procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Pakistan or any administrative subdivision or agency thereof or any other entity owned or controlled by it (GoP) through any corrupt business practice.

Without limiting the generality of the foregoing [Name of Supplier] represents and warrants that it has fully declared the brokerage, commission, fee etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultations fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from GoP, except that which has been expressly declared pursuant hereto.

[Name of Supplier] certifies that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with GoP and has not taken any action or will not take any action to circumvent the above declaration, representative or warranty.

[Name of Supplier] accepts full responsibility and strict liability for making and false declaration, not making full disclosure, misrepresenting fact or taking any action likely to defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other right and remedies available to GoP under any law, contract or other instrument, be voidable at the option of GoP.

Notwithstanding any rights and remedies exercised by GoP in this regard, [Name of Supplier] agrees to indemnify GoP for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to GoP in an amount equivalent to ten time the sum of any commission, gratification, bribe, finder's fee or kickback given by [Name of Supplier] as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from GoP.

Performance Guarantee Form

Performance Guarantee Form

To: **Pakistan Infrastructure Development Co. Ltd. (PIDCL (Pakistan Infrastructure Development Co. Ltd. (PIDCL)), Assistant Manager 6th Floor, Ext Block, Bahria Complex-VI, Gizri., Saddar Sub-Division, Karachi South (District), Karachi (Division), Sindh (Province).**

WHEREAS *[name of Bidder]* (hereinafter called "the Bidder") has undertaken, in pursuance of Contract No. *[reference number of the contract]* dated *[insert date]* for provision of Goods*(*hereinafter called "the Contract").

AND WHEREAS it has been stipulated by you in the said Contract that the Bidder shall furnish you with a Bank Guarantee by a reputable bank for the sum specified therein as security for compliance with the Bidder's performance obligations in accordance with the Contract.

AND WHEREAS we have agreed to give the Bidders guarantee:

THEREFORE, WE hereby affirm that we are Guarantors and responsible to you, on behalf of the Bidder, up to a total of *[amount of the guarantee in words and figures]*, and we undertake to pay you, upon your first written demand declaring the Bidder to be in default under the Contract and without cavil or argument, any sum or sums within the limits of *[amount of guarantee]* as aforesaid, without your needing to prove or to show grounds or reasons for your demand or the sum specified therein.

This guarantee is valid until the: *[insert date]*

Signature and seal of the Guarantors

_____

[name of bank or financial institution]

_____

[address]

_____

[date}

Annexure

BOQ

Information (Read-Only)

See Form Under Additional Forms and Documents: **BOQ** (page number: 77)

DRAWINGS

Information (Read-Only)

See Form Under Additional Forms and Documents: **DRAWINGS** (page number: 118)

RATE TO BE QOUTED

Financial Submission (Vendor)

Document Required

See Form Under Additional Forms and Documents: **RATE TO BE QOUTED** (page number: 120)

Procurement Forms

PUBLIC PROCUREMENT REGULATORY AUTHORITY
(PPRA)
EPADS

PUBLIC PROCUREMENT REGULATORY AUTHORITY
(PPRA)
EPADS

Additional Forms and Documents

PROVINCE: **SINDH**
BRANCH: **B/R**
NAME OF WORK: **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

GENERAL ABSTRACT

SH-I	BUILDING	Rs. 20484500.00 /-
		Rs. 20484500.00 /-
SH-II	BUILDING FF	Rs. 14556250.00 /-
		Rs. 14556250.00 /-
SH-III	Second Floor (including Security Post)	Rs. 1986875.00 /-
		Rs. 1986875.00 /-
SH-IV	Parapet Wall	Rs. 576000.00 /-
		Rs. 576000.00 /-
SH-V	UGT	Rs. 1687500.00 /-
		Rs. 1687500.00 /-
SH-VI	OHT	Rs. 932662.00 /-
		Rs. 932662.00 /-
SH-VII	Guard Room & Driver room	Rs. 2008125.00 /-
		Rs. 2008125.00 /-
SH-VIII	W/S & S/I	Rs. 1551500.00 /-
		Rs. 1551500.00 /-
SH-IX	Compound Wall	Rs. 10711250.00 /-
		Rs. 10711250.00 /-
SH-X	Parking Shed	Rs. 1182500.00 /-
SH-XI	Earth Filling (outer side of building)	Rs. 2786428.00 /- /-
		Rs. 2786428.00 /-

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

SH-XII SOIL INVESTIGATION	Rs. 500000.00 **/-**
SH-XIII Electrification / Gas (Internal / External) & Allied works	Rs. 3723600.00 **/-**
	Rs. **62687190** **/-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

PROVINCE :- **SINDH**
BRANCH :- **B/R**
NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-I BUILDING				
1 .P-40 I-04	Excavation for foundation trenches and drains in wet silt clay or mud and back filling the excavated material in foundation trenches, plinth or under floor including breaking clods, watering, consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction, dressing and disposal of surplus excavated stuff as directed lead upto one chain (30.5 R.m) and lift upto 5 feet (1.52 m).	13914.00 Cft	2,755.25	% Cft (Hundrd cubic feet)	383365 /-
2 P-52 I-13	Providing and laying 1:4:8 (1 cement 4 sand and 8 coarse aggregate) cement concrete using graded stone ballast 2 inches and down gauge in foundation including leveling, compacting and curing etc. complete.	1573.00 Cft	21744.25	% Cft (Hundrd cubic feet)	342037 /-
3 P-173+195 I-1+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in column footing of required shape including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in foundation basement and plinth	2351.00 Cft	38098.77	% Cft (Hundrd cubic feet)	895702 /-
4 P-173+195 I-4+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .	252.00 Cft	41920.62	% Cft (Hundrd cubic feet)	105640 /-
5 P-173+195 I-5+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of circular shape of uniform section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth	188.00 Cft	48802.2	% Cft (Hundrd cubic feet)	91748 /-

6 P-132 I-1	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls more than 13-1/2 inches (343 mm) thick including scaffolding, raking out Joints and curing etc. Complete in foundation, basement and plinth (foundation and basement masonry upto 5 feet (1.52 Ru.m.) depth and plinth upto 4 feet (1.2 Ru.m.) height from ground level) .	472.00 Cft	36129.72	% Cft (Hundrd cubic feet)	170532 /-
7 P-132 I-2	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9" to 13-/2 inches (228 mm to 343 mm) thick including scaffolding, raking out Joints and curing etc. complete in foundation, basement and plinth (foundation and basement masonry upto 5	1889.00 Cft	38582.85	% Cft (Hundrd cubic feet)	728830 /-
8 P-174+195 I-8+136	Providing and laying reinforced cement concrete using crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs.. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in plinth beams of required shape and design including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, tn foundation basement and plinth	1029.00 Cft	40365.27	%Cft (Hundrd cubic feet)	415359 /-
9 P-49 I-09	Supplying stacking and filling sand of approved quality from outside sources in foundation, trenches, plinth or under floor, etc. including dressing, watering and consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction and lift upto 5 feet (1 .52 m).	9480.00 Cft	4869.94	% Cft (Hundred cubic feet)	461670 /-
10 P-231 I-02	Providing and laying 1:4:8 cement concrete bed under floors using graded stone ballast 1 inche (25 mm) and down gauge with levelling and ramming, watering and curing etc. complete..	861.00 Cft	22036.75	% Cft (Hundred cubic feet)	189736 /-
11 P-132+136 I-2+36	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls more than 13-1/2 inches (343 mm) thick including scaffolding, raking out Joints and curing etc. Complete in foundation, basement and plinth (foundation and basement masonry upto 5 feet (1.52 Ru.m.) depth and plinth upto 4 feet (1.2 Ru.m.) height from ground level). (in steps)	336.00 Cft	42277.85	% Cft (Hundrd cubic feet)	142054 /-

12 P-176+195 I-24+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .(Ground Floor)	462.00 Cft	52698.67	% Cft (Hundrd cubic feet)	243468 /-
13 P-176+195 I-25+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15-52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in circular pillars of regular including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in ground floor	377.00 Cft	52524.88	% Cft (Hundred cubic foot)	198019 /-
14 P-179+195 I-38+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and ground floor.	1609.00 Cft	47322.89	% Cft (Hundred cubic foot)	761425 /-
15 P-183+195 I-58+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab 3 inches (76 mm) thick including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and ground floor	36.00 Cft	57783.23	% Cft (Hundred cubic foot)	20802 /-
16 P-135 I-25	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches (229 mm to 343 mm) thick including scaffolding, raking, out joints and curing etc. complete in ground floor superstructure .	4609.00 Cft	41260.97	% Cft (Hundrd cubic feet)	1901718 /-
17 P-181+195 I-50+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight stairs and landing of required section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and ground floor.	156.00 Cft	57830.03	% Cft (Hundred cubic foot)	90215 /-

18 P-182+195 I-56+136	Providing and faying reinforced cement concrete using Crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary slab 5 inches (127 mm) to 6 inches (152 mm) thick Including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and ground floor	1769.00 Cft	45586.77	% Cft (Hundred cubic foot)	806430 /-
19 P-183+195 I-60+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab horizontal sun-shade or chajja tapered or straight average 5 inches (127 mm) to 6 inches (152 mm) thick including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and first floor	173.00 Cft	50456.43	% Cft (Hundred cubic foot)	87290 /-
20 P-197 I-166	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in foundation, basement, plinth and ground floor of building including septic tanks and under ground tanks and in projections for future extension .	375.10 Cwt	14349.01	P.Cwt (Per hundred weight)	5384062 /-
21 P-289 I-44	Providing and fixing M.S. moulded steel door frames of 5.73" x 2-1/2" (146 mm x 63 mm) manufactured from mild steel sheet of 18 gauge (1.41 mm) conforming to B.S.S. 1245 having a double rebate size 1-1/2" x 1/2" (38 mm x 12 mm) provision of 3 Nos. M.S. plate, section 1-1/2" x 1/4" (38 mm x 6 mm) (2 Nos. 6 inch long welded with frame at not less than 10 points and 1 Nos. 12 inch long welded with frame at not less than 20 points), with holes and threads for fixing steel hings, fitted with one locking box of same sheet (point welded inside the frame), 6 Nos. 6 inches long flat iron fixing lugs of 1-1/4" x 3/16" section, treated with special red oxide primer coat all around including cutting holes and filling the cavity with cement concrete 1:2:4 etc. in any floor at any height complete as directed by the Engineer-in-Charge	331.00 Rft	469.80	P.Rft (Per Running foot)	155504 /-
22 P-376 I-02	1/4" (6.4 mm) thick cement plaster 1:4 on soffits of ceiling, cantilever slabs, sides and soffits of beams etc., in basement, mezzanine and ground floor including making edges, corners and curing etc., complete .	3279.00 Sft	3852.59	% Sft Hundred Square feet)	126326 /-

23 P-376 I-10	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in basement, plinth, mezzanine and ground floor including making edges, corners, and curing etc., complete	15813.00 Sft	4815.26	% Sft Hundred Square feet)	761437 /-
24 P-302 I-100	Providing and fixing fully glazed Bronze anodized or powder coated aluminium Sliding windows as per British standard manufactured by Lucky, Prime, Chawla, Krudson, and Pakistan cable (fixing through their approved fabricators) deluxe model box section 95mm x 30mm and 1.6mm thick including the cost of aluminium netting ,fittings, with all accessories cutting hole etc. and making good damages to walls etc. complete as required in any floor as per direction of engineer-in-charge, but excluding the cost of glass pans.	354.00 Sft	1179.69	P.Sft (Per Square foot)	417610 /-
25 P-307 I-121	Providing and fixing Tinted glass panes 5mm thick to M.S. Box pipe / Aluminium doors, windows and ventilators etc including the cost of labour but excluding the cost of M.S. square pipe beading, rubber packing and screw in any floor at any height.	319.00 Sft	371.82	P.Sft (Per Square foot)	118611 /-
26 P-287 I-32	Providing and fixing iron grills with required section of flat iron as per approved design including welding all sides of the section at the junction, and fixing with sunk iron screws, painting two coats of red oxide paint etc. complete as required in any floor in masonry or concrete work.	16.00 Cwt	14777.85	P.Cwt (Per Hundred weight)	236446 /-
27 P-256 I-186	Providing & laying light/colour unglazed vitrified porcelain tiles (polished) exceeding 1600 Sq. cm and upto 3600 Sq cm each on walls & floors foreign make (Italian or equivalent except China make) in any floor laid with dry bond (stile bond) over on 1" thick cement mortar (1:3) including jointing the tiles with joint filler of approved qualityas per direction of the Engineer incharge.	2312.00 Sft	70814.43	%Sft Hundred square foot)	1637230 /-
28 P-242 I-82	Providing and laying floor of 6 mm (approx. 1/4 inches) thick coloured glazed tiles12" X 12" (304 mm X 304 mm) of master make Pakistani first grade in ground floor in ground floor laid over 1 inch (25 mm) thick cement mortar base 1:2 (one cement 2 sand) including jointing and washing the tiles with white cement slurry of matching colour (by using pigment in white cement) and curing etc. complete.	335.00 Sft	30212.46	%Sft Hundred square foot)	101212 /-
29 P-266 I-47	Providing and fixing 1/4"(6mm approx.) thick of Pakistani make first grade coloured glazed tiles upto 144 Sq inch size in dado and skirting in ground floor over 1/2" (13mm) thick base of cement mortar 1:3 setting of tiles in slurry of grey cement over mortar base including filling the joint with white cement slurry to matching the colour and washing the tile, curing and cleaning etc. complete	1243.00 Sft	26546.93	%Sft Hundred square foot)	329978 /-
30	Providing and laying floor of 1 inch (25 mm)	377.00	81539.13	%Sft	307403 /-

P-239+241 I-58+77	thick white marble tiles, more than one Sq.ft. upto 3 Sq.ft. (more than 0.093 Sq.m upto 0.28 Sq.m) size fine dressed on the surface, without winding in ground floor over 1 inch (25 mm) lime mortar 1:2 (one lime two sand) setting the marble tiles with grey cement slurry over lime mortar, jointing and washing the tiles with white cement slurry including curing, rubbing and polishing etc. complete, including the cost of mortar in stairs / steps.	Sft		Hundred square foot)	
31 P-263 I-16	Providing and fixing 3/8 inch (9.5 mm) thick white marble tiles above 144 Sq. inches (928 Sq.cm) size fine dressed on the surface without windings in dado and skirting and facing etc. in ground floor over 1/2 inch (13 mm) thick base of cement mortar 1:3 setting of tiles in slurry of grey cement over mortar base including filling the joints and washing the tiles with white cement slurry curing, finishing, cleaning and polishing etc. in internal work complete..	220.00 Sft	30137.00	%Sft Hundred square foot)	66301 /-
32 P-313 I-22	Providing and fixing 1-1/2 inch (38 mm) thick best quality deodar wood shutters fully panelled with same wood, approved iron hinges and tower bolts, etc., as required..	466.00 Sft	1651.66	P.Sft (Per Square foot)	769674 /-
33 P-364 I-160	Providing and fixing approved brass handles 5" (127 mm) size heavy type with becessary brass screws .	19.00 Nos	357.74	Each	6797 /-
34 P-358 I-77	Providing and fixing with brass screws Alpha knob set bath latch of approved design No. 8000, Japan make, cutting wood to required shape and size with two operating keys as per direction of the engineer-in-Charge	19.00 Nos	4274.38	Each	81213 /-
35 P-357 I-70	Providing and fixing with brass screws or specially supplied screws hydraulic door closer Rayobi or approved design No. 72, Japan make, cutting wood etc., to required shape and size as per direction of engineer-in-charge .	13.00 Nos	9331.25	Each (Each)	121306 /-
36 P-82 I-25	Providing and laying 1:9 cement concrete using screened graded bajri 3/4 inch and down gauge In terracing 3 inches average thickness to required slope in panels including form work, consolidation, finishing, curing etc. and painting the surface with plastic bitumen No. 4 at the rate of 15 Ibs per hundred square feet (0.73 Kg per s.m) blinded with sand at the rate of 2 cubic feet per hundred square feet (0.06 Kg per s.m) complete" on ground floor roof.	329.00 Sft	8229.59	% Sft Hundred Square feet)	27075 /-
37 P-389 I-151	Distempering with vinyle distemper (ICI) Dulux Paintex of approved make and shade in two coats over and including the cost of one priming coat of lime wash including sand papering, dusting, and filling the holes, cracks and inequalities, if any, at any height in any floor.	12837.00 Sft	3401.25	% Sft Hundred Square feet)	436618 /-
38	Painting three coats with weather shield paint	6255.00	4408.75	% Sft	275767 /-

P-390 I-172	deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	Sft		Hundred Square feet)	
39 P-389 I-160	Painting wood work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	1150.00 Sft	5954.86	% Sft Hundred Square feet)	68481 /-
40 P-389 I-159	Painting Iron work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	354.00 Sft	6071.25	% Sft Hundred Square feet)	21492 /-
41 P-427 I-189	Providing and fixing Plaster of Paris tiles size (2' x 2' x 3/4") for falls ceiling I/c Aluminum T and L angle 1" x 1" i.c hanger clips jointing clips and g.I. Wire etc complete as required in any floor.	2311.00 Sft	244.92	Per Sft (Per square Foot)	566010 /-
42 SC-202 I-202	providing & fixing 2" dia stainles steel pipe (18 guage) railing alongwith 4 Nos 3/4" dia parallel pipe having S/S pipe vertical post 2" dia at 3 ft c/c average spacing and 4" diavertical post at start turning and end point including cost of labour, welding charges fitting & fixing in marble floor and wall etc complete as per direction of the Engineer Incharge.	102.00 Sft	4234.38	Per Sft (Per square Foot)	431907 /-
				TOTAL	**20484500 /-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-I BUILDING FIRST FLOOR				
1 P-176+195+188 I-24+136+92	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .(First Floor)	462.00 Cft	55510.13	% Cft (Hundrd cubic feet)	256457.00 /-
2 P-176+195+188 I-25+136+92	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15-52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in circular pillars of regular including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in First floor	226.00 Cft	55336.34	% Cft (Hundred cubic foot)	125060.00 /-
3 P-179+195+188 I-38+136+92	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and First floor.	1440.00 Cft	50134.35	% Cft (Hundred cubic foot)	721935.00 /-
4 P-183+195+188 I-58+136+92	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab 3 inches (76 mm) thick including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in first floor	38.00 Cft	60594.69	% Cft (Hundred cubic foot)	23026.00 /-
5 P-135+140 I-25+70	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches (229 mm to 343 mm) thick including scaffolding, raking, out joints and curing etc. complete in first floor superstructure .	3899.00 Cft	43602.06	% Cft (Hundrd cubic feet)	1700044.00 /-
17	Providing and laying reinforced cement	156.00	60641.49	% Cft	94601.00 /-

P-181+195+188 I-50+136+92	concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight stairs and landing of required section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in First floor.	Cft		(Hundred cubic foot)	
18 P-182+195+188 I-56+136+92	Providing and faying reinforced cement concrete using Crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary slab 5 inches (127 mm) to 6 inches (152 mm) thick Including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in First floor	1604.00 Cft	48398.23	% Cft (Hundred cubic foot)	776308.00 /-
19 P-183+195+188 I-60+136+92	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab horizontal sun-shade or chajja tapered or straight average 5 inches (127 mm) to 6 inches (152 mm) thick including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in first floor	173.00 Cft	53267.89	% Cft (Hundred cubic foot)	92153.00 /-
20 P-197+198 I-166+174	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in First floor of building including septic tanks and under ground tanks and in projections for future extension .	247.00 Cwt	14574.64	P.Cwt (Per hundred weight)	3600576.00 /-
21 P-289 I-44	Providing and fixing M.S. moulded steel door frames of 5.73" x 2-1/2" (146 mm x 63 mm) manufactured from mild steel sheet of 18 gauge (1.41 mm) conforming to B.S.S. 1245 having a double rebate size 1-1/2" x 1/2" (38 mm x 12 mm) provision of 3 Nos. M.S. plate, section 1-1/2" x 1/4" (38 mm x 6 mm) (2 Nos. 6 inch long welded with frame at not less than 10 points and 1 Nos. 12 inch long welded with frame at not less than 20 points), with holes and threads for fixing steel hings, fitted with one locking box of same sheet (point welded inside the frame), 6 Nos. 6 inches long flat iron fixing lugs of 1-1/4" x 3/16" section, treated with special red oxide primer coat all around including cutting holes and filling the cavity with cement concrete 1:2:4 etc. in any floor at any height complete as directed by the Engineer-in-Charge	289.00 Rft	469.80	P.Rft (Per Running foot)	135772.00 /-

22 P-376+384 I-02+87	1/4" (6.4 mm) thick cement plaster 1:4 on soffits of ceiling, cantilever slabs, sides and soffits of beams etc., in First floor including making edges, corners and curing etc., complete .	2964.00 Sft	4160.09	% Sft Hundred Square feet)	123305.00 /-
23 P-376+384 I-10+88	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in First floor including making edges, corners, and curing etc., complete	15595.00 Sft	5225.26	% Sft Hundred Square feet)	814879.00 /-
24 P-302 I-100	Providing and fixing fully glazed Bronze anodized or powder coated aluminium Sliding windows as per British standard manufactured by Lucky, Prime, Chawla, Krudson, and Pakistan cable (fixing through their approved fabricators) deluxe model box section 95mm x 30mm and 1.6mm thick including the cost of aluminium netting ,fittings, with all accessories cutting hole etc. and making good damages to walls etc. complete as required in any floor as per direction of engineer-in-charge, but excluding the cost of glass pans.	375.00 Sft	1179.69	P.Sft (Per Square foot)	442384.00 /-
25 P-307 I-121	Providing and fixing Tinted glass panes 5mm thick to M.S. Box pipe / Aluminium doors, windows and ventilators etc including the cost of labour but excluding the cost of M.S. square pipe beading, rubber packing and screw in any floor at any height.	337.00 Sft	371.82	P.Sft (Per Square foot)	125303.00 /-
26 P-287 I-32	Providing and fixing iron grills with required section of flat iron as per approved design including welding all sides of the section at the junction, and fixing with sunk iron screws, painting two coats of red oxide paint etc. complete as required in any floor in masonry or concrete work.	17.30 Cwt	14777.85	P.Cwt (Per Hundred weight)	255657.00 /-
27 P-256 I-186	Providing & laying light/colour unglazed vitrified porcelain tiles (polished) exceeding 1600 Sq. cm and upto 3600 Sq cm each on walls & floors foreign make (Italian or equivalent except China make) in any floor laid with dry bond (stile bond) over on 1" thick cement mortar (1:3) including jointing the tiles with joint filler of approved qualityas per direction of the Engineer incharge.	2345.00 Sft	70814.43	%Sft Hundred square foot)	1660598.00 /-
28 P-197 I-82+89	Providing and laying floor of 6 mm (approx. 1/4 inches) thick coloured glazed tiles12" X 12" (304 mm X 304 mm) of master make Pakistani first grade in ground floor in ground floor laid over 1 inch (25 mm) thick cement mortar base 1:2 (one cement 2 sand) including jointing and washing the tiles with white cement slurry of matching colour (by using pigment in white cement) and curing etc. complete.	285.00 Sft	30806.21	%Sft Hundred square foot)	87798.00 /-
29	Providing and fixing 1/4"(6mm approx.) thick	1033.00	27309.43	%Sft	282106.00 /-

P-266 I-47+49	of Pakistani make first grade coloured glazed tiles upto 144 Sq inch size in dado and skirting in ground floor over 1/2" (13mm) thick base of cement mortar 1:3 setting of tiles in slurry of grey cement over mortar base including filling the joint with white cement slurry to matching the colour and washing the tile, curing and cleaning etc. complete	Sft		Hundred square foot)	
30 P-239+241+242 I-58+77+79	Providing and laying floor of 1 inch (25 mm) thick white marble tiles, more than one Sq.ft. upto 3 Sq.ft. (more than 0.093 Sq.m upto 0.28 Sq.m) size fine dressed on the surface, without winding in ground floor over 1 inch (25 mm) lime mortar 1:2 (one lime two sand) setting the marble tiles with grey cement slurry over lime mortar, jointing and washing the tiles with white cement slurry including curing, rubbing and polishing etc. complete, including the cost of mortar in stairs / steps.	377.00 Sft	82132.88	%Sft Hundred square foot)	309641.00 /-
31 P-263+264 I-16+27	Providing and fixing 3/8 inch (9.5 mm) thick white marble tiles above 144 Sq. inches (928 Sq.cm) size fine dressed on the surface without windings in dado and skirting and facing etc. in ground floor over 1/2 inch (13 mm) thick base of cement mortar 1:3 setting of tiles in slurry of grey cement over mortar base including filling the joints and washing the tiles with white cement slurry curing, finishing, cleaning and polishing etc. in internal work complete..	220.00 Sft	30730.75	%Sft Hundred square foot)	67608.00 /-
32 P-313 I-22	Providing and fixing 1-1/2 inch (38 mm) thick best quality deodar wood shutters fully panelled with same wood, approved iron hinges and tower bolts, etc., as required..	374.00 Sft	1651.66	P.Sft (Per Square foot)	617721.00 /-
33 P-364 I-160	Providing and fixing approved brass handles 5" (127 mm) size heavy type with becessary brass screws .	17.00 Nos	357.74	Each	6082.00 /-
34 P-358 I-77	Providing and fixing with brass screws Alpha knob set bath latch of approved design No. 8000, Japan make, cutting wood to required shape and size with two operating keys as per direction of the engineer-in-Charge	17.00 Nos	4274.38	Each	72664.00 /-
35 P-357 I-70	Providing and fixing with brass screws or specially supplied screws hydraulic door closer Rayobi or approved design No. 72, Japan make, cutting wood etc., to required shape and size as per direction of engineer-in-charge .	11.00 Nos	9331.25	Each (Each)	102644.00 /-
36 P-82 I-25	Providing and laying 1:9 cement concrete using screened graded bajri 3/4 inch and down gauge In terracing 3 inches average thickness to required slope in panels including form work, consolidation, finishing, curing etc. and painting the surface with plastic bitumen No. 4 at the rate of 15 Ibs per hundred square feet (0.73 Kg per s.m) blinded with sand at the rate of 2 cubic feet per hundred square feet (0.06 Kg per s.m) complete"	3554.00 Sft	8229.59	% Sft Hundred Square feet)	292480.00 /-
37	Distempering with vinyle distemper (ICI)	12555.00	3401.25	% Sft	427027.00 /-

P-389 I-151	Dulux Paintex of approved make and shade in two coats over and including the cost of one priming coat of lime wash including sand papering, dusting, and filling the holes, cracks and inequalities, if any, at any height in any floor.	Sft		Hundred Square feet)	
38 P-390 I-172	Painting three coats with weather shield paint deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	6004.00 Sft	4408.75	% Sft Hundred Square feet)	264701.00 /-
39 P-389 I-160	Painting wood work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	929.00 Sft	5954.86	% Sft Hundred Square feet)	55321.00 /-
40 P-389 I-159	Painting Iron work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	375.00 Sft	6071.25	% Sft Hundred Square feet)	22767.00 /-
41 P-427 I-189	Providing and fixing Plaster of Paris tiles size (2' x 2' x 3/4") for falls ceiling I/c Aluminum T and L angle 1" x 1" i.c hanger clips jointing clips and g.I. Wire etc complete as required in any floor.	2318.00 Sft	244.92	Per Sft (Per square Foot)	567725.00 /-
42 SC-202 I-202	providing & fixing 2" dia stainles steel pipe (18 guage) railing alongwith 4 Nos 3/4" dia parallel pipe having S/S pipe vertical post 2" dia at 3 ft c/c average spacing and 4" diavertical post at start turning and end point including cost of labour, welding charges fitting & fixing in marble floor and wall etc complete as per direction of the Engineer Incharge.	102.00 Sft	4234.38	Per Sft (Per square Foot)	431907.00 /-
				TOTAL	**14556250 /-**

PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-I BUILDING 2ND FLOOR				
1 P-176+195+188+189 I-24+136+92+93	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .(2nd Floor)	114.00 Cft	57720.72	% Cft (Hundrd cubic feet)	65802.00 /-
3 P-179+195+188+189 I-38+136+92+93	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and 2nd floor.	162.00 Cft	52344.94	% Cft (Hundred cubic foot)	84799.00 /-
4 P-183+195+188+189 I-58+136+92+93	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab 3 inches (76 mm) thick including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in 2nd floor	8.00 Cft	62805.28	% Cft (Hundred cubic foot)	5024.00 /-
5 P-135+140 I-25+70+71	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches (229 mm to 343 mm) thick including scaffolding, raking, out joints and curing etc. complete in 2nd floor superstructure .	679.00 Cft	45455.56	% Cft (Hundrd cubic feet)	308643.00 /-
18 P-182+195+188+189 I-56+136+92+93	Providing and faying reinforced cement concrete using Crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary slab 5 inches (127 mm) to 6 inches	201.00 Cft	50608.82	% Cft (Hundred cubic foot)	101724.00 /-

	(152 mm) thick Including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in 2nd floor				
19 P-183+195+188+189 I-60+136+92+93	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab horizontal sun-shade or chajja tapered or straight average 5 inches (127 mm) to 6 inches (152 mm) thick including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in 2nd floor	92.00 Cft	55478.48	% Cft (Hundred cubic foot)	51040.00 /-
20 P-197+198 I-166+174+175	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in 2nd floor of building including septic tanks and under ground tanks and in projections for future extension .	30.60 Cwt	14800.27	P.Cwt (Per hundred weight)	451425.00 /-
21 P-289 I-44	Providing and fixing M.S. moulded steel door frames of 5.73" x 2-1/2" (146 mm x 63 mm) manufactured from mild steel sheet of 18 gauge (1.41 mm) conforming to B.S.S. 1245 having a double rebate size 1-1/2" x 1/2" (38 mm x 12 mm) provision of 3 Nos. M.S. plate, section 1-1/2" x 1/4" (38 mm x 6 mm) (2 Nos. 6 inch long welded with frame at not less than 10 points and 1 Nos. 12 inch long welded with frame at not less than 20 points), with holes and threads for fixing steel hings, fitted with one locking box of same sheet (point welded inside the frame), 6 Nos. 6 inches long flat iron fixing lugs of 1-1/4" x 3/16" section, treated with special red oxide primer coat all around including cutting holes and filling the cavity with cement concrete 1:2:4 etc. in any floor at any height complete as directed by the Engineer-in-Charge	37.00 Rft	469.80	P.Rft (Per Running foot)	17383.00 /-
22 P-376+384 I-02+87+90	1/4" (6.4 mm) thick cement plaster 1:4 on soffits of ceiling, cantilever slabs, sides and soffits of beams etc., in First floor including making edges, corners and curing etc., complete .	537.00 Sft	4396.34	% Sft Hundred Square feet)	23608.00 /-
23 P-376+384 I-10+88+91	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in First floor including making edges, corners, and curing etc., complete	2518.00 Sft	5540.26	% Sft Hundred Square feet)	139504.00 /-

24 P-302 I-100	Providing and fixing fully glazed Bronze anodized or powder coated aluminium Sliding windows as per British standard manufactured by Lucky, Prime, Chawla, Krudson, and Pakistan cable (fixing through their approved fabricators) deluxe model box section 95mm x 30mm and 1.6mm thick including the cost of aluminium netting ,fittings, with all accessories cutting hole etc. and making good damages to walls etc. complete as required in any floor as per direction of engineer-in-charge, but excluding the cost of glass pans.	64.00 Sft	1179.69	P.Sft (Per Square foot)	75500.00 /-
25 P-307 I-121	Providing and fixing Tinted glass panes 5mm thick to M.S. Box pipe / Aluminium doors, windows and ventilators etc including the cost of labour but excluding the cost of M.S. square pipe beading, rubber packing and screw in any floor at any height.	58.00 Sft	371.82	P.Sft (Per Square foot)	21566.00 /-
26 P-287 I-32	Providing and fixing iron grills with required section of flat iron as per approved design including welding all sides of the section at the junction, and fixing with sunk iron screws, painting two coats of red oxide paint etc. complete as required in any floor in masonry or concrete work.	3.00 Cwt	14777.85	P.Cwt (Per Hundred weight)	44334.00 /-
27 P-256 I-186	Providing & laying light/colour unglazed vitrified porcelain tiles (polished) exceeding 1600 Sq. cm and upto 3600 Sq cm each on walls & floors foreign make (Italian or equivalent except China make) in any floor laid with dry bond (stile bond) over on 1" thick cement mortar (1:3) including jointing the tiles with joint filler of approved qualityas per direction of the Engineer incharge.	374.00 Sft	70814.43	%Sft (Hundred square foot)	264846.00 /-
32 P-313 I-22	Providing and fixing 1-1/2 inch (38 mm) thick best quality deodar wood shutters fully panelled with same wood, approved iron hinges and tower bolts, etc., as required..	58.00 Sft	1651.66	P.Sft (Per Square foot)	95796.00 /-
33 P-364 I-160	Providing and fixing approved brass handles 5" (127 mm) size heavy type with becessary brass screws .	2.00 Nos	357.74	Each	715.00 /-
34 P-358 I-77	Providing and fixing with brass screws Alpha knob set bath latch of approved design No. 8000, Japan make, cutting wood to required shape and size with two operating keys as per direction of the engineer-in-Charge	2.00 Nos	4274.38	Each	8549.00 /-
35 P-357 I-70	Providing and fixing with brass screws or specially supplied screws hydraulic door closer Rayobi or approved design No. 72, Japan make, cutting wood etc., to required shape and size as per direction of engineer-in-charge .	2.00 Nos	9331.25	Each (Each)	18663.00 /-

37 P-389 I-151	Distempering with vinyle distemper (ICI) Dulux Paintex of approved make and shade in two coats over and including the cost of one priming coat of lime wash including sand papering, dusting, and filling the holes, cracks and inequalities, if any, at any height in any floor.	1732.00 Sft	3401.25	% Sft Hundred Square feet)	58910.00 /-
38 P-390 I-172	Painting three coats with weather shield paint deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	1323.00 Sft	4408.75	% Sft Hundred Square feet)	58328.00 /-
39 P-389 I-160	Painting wood work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	142.00 Sft	5954.86	% Sft Hundred Square feet)	8456.00 /-
40 P-389 I-159	Painting Iron work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	64.00 Sft	6071.25	% Sft Hundred Square feet)	3886.00 /-
41 P-427 I-189	Providing and fixing Plaster of Paris tiles size (2' x 2' x 3/4") for falls ceiling I/c Aluminum T and L angle 1" x 1" i.c hanger clips jointing clips and g.I. Wire etc complete as required in any floor.	320.00 Sft	244.92	Per Sft (Per square Foot)	78374.00 /-
				TOTAL	**1986875 /-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

PROVINCE :- **SINDH**
BRANCH :- **B/R**
NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-I BUILDING				
1 P-176+195+188+189 I-24+136+92+93	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .(2nd Floor)	101.00 Cft	57720.72	% Cft (Hundrd cubic feet)	58298.00 /-
5 P-135+140 I-25+70+71	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches (229 mm to 343 mm) thick including scaffolding, raking, out joints and curing etc. complete in 2nd floor superstructure .	547.00 Cft	45455.56	% Cft (Hundrd cubic feet)	248642.00 /-
20 P-197+198 I-166+174+175	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in 2nd floor of building including septic tanks and under ground tanks and in projections for future extension .	4.50 Cwt	14800.27	P.Cwt (Per hundred weight)	62618.00 /-
23 P-376+384 I-10+88+91	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in First floor including making edges, corners, and curing etc., complete	2075.00 Sft	5540.26	% Sft Hundred Square feet)	114960.00 /-
38 P-390 I-172	Painting three coats with weather shield paint deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	2075.00 Sft	4408.75	% Sft Hundred Square feet)	91482.00 /-
				TOTAL	**576000 /-**

PROVINCE : **SINDH**
BRANCH **B/R**
NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-UNDER GROUND TANK				
1 .P-40 I-01	Excavation for foundation and drains in all kinds of soil (except gravelly and murrum soil,wet silt,clay or mud and conglomeration of gravel and oulders,soft,sandy or disintegrated sandy and hard rock) back filling the excavated material in foundation trenches, plinth or under floor including breaking clods, watering, consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction, dressing and disposal of surplus excavated stuff as directed lead upto one chain (30.5 R.m) and lift upto 5 feet (1.52 m).	2160.00 Cft	1624.63	% Cft (Hundrd cubic feet)	35092.00 /-
.P-40+43 I-01+28	(b) 5' to 8'	1296.00	1862.13	% Cft	24133.00 /-
2 P-231 I-02	Providing and laying 1:4:8 cement concrete bed under floors using graded stone ballast 2 inches (51 mm) and down gauge with levelling and ramming, watering and curing etc. complete..	432.00 Cft	22036.75	% Cft (Hundred cubic feet)	95199.00 /-
3 P-189+195 I-99+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in foundation or bottom slab of rectangular underground tank including form works and its removal, levelling, compacting and curing etc. complete but excluding the cost of reinforcement..	176.00 Cft	31431.41	% Cft (Hundred cubic feet)	55319.00 /-
4 P-189+195 I-101+136	Providing and laying reinforced cement concrete using, screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in walls of rectangular underground water tank or septic tank including form works and its removal, compacting and curing etc. complete, but excluding the cost of reinforcement..	702.00 Cft	54533.03	% Cft (Hundred cubic feet)	382822.00 /-
5 P-190+195 I-104+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in top slab of rectangular underground water tank or septic tank its removal, compacting and curing ate. complete but excluding the cost of reinforcement .	264.00 Cft	46752.23	% Cft (Hundred cubic feet)	123426.00 /-

6 P-197 I-166	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in foundation, basement, plinth and ground floor of building including septic tanks and under ground tanks and in projections for future extension .	62.20 Cwt	14349.01	P.Cwt (Per hundred weight)	892841.00 /-
7 P-376 I-06	1/2" thick cement plaster 1:6 on walls and columns etc in basement, plinth, mezzanine and ground floor including making edges, corners, and curing etc; complete.	955.00 Sft	4034.92	% Sft (Hundred Square feet)	38533.00 /-
8 P-423 I-141	Providing and laying gola 3" x 3" (76 mm x 76 mm) concrete 1:2:4 using graded screened bajri at junction of roof slab and walls and finished with cement plaster 1:4 including curing etc. complete.	106.00 Rft	3202.36	%Rft (Hundred running foot)	3395.00 /-
9 P-595 I-29	Providing and laying R.C.C 1:2:4 slab cover 3" thick average (pre-cast complete with M.S angle iron frame, M.S bars embeded in concrete) of any shape including the cost of reinforcement and welding etc.as per directons of Engineer in charge.	5.00 Cft	2274.73	Per Cft	11374.00 /-
10 P-566 I-11	Providing and fixing un platisized polyvinyl chloride pipe (u.P.V.C) "E" class or PPRC pipe with specials) and clamps etc., including cutting and fitting, complete with and including the cost of breaking through walls and roof and making good etc.; after cleaning the pipe and cartage within 10 miles (16.09 km) (working pressure 12 kg/cm2): 3/4 inch (20 mm) dia.	63.00 Rft	96.88	P.Rft (Per Running Foot)	6103.00 /-
11 P-231 I-6	Providing and laying floors of 2 inches (51 mm) thick 1:2:4 cement concrete using graded screened bajri 3/4 inch (19 mm) and down gauge in ground floor laid in panels including form work, consolidation, finishing, and curing etc. complete.	280.00 Sft	6879.77	% Sft (Hundred Square feet)	19263.00 /-
				TOTAL	**1687500 /-**

PROVINCE :- **SINDH**

NAME OF WORK: **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER**

S #	Description of item	Quantity	Rate	Unit	Amount
	SH: OVER HEAD TANK				
1 P-176+195+188+18 I-24+136+92+93+9	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth. (2nd Floor)	12.00 Cft	59931.31	% Cft (Hundrd cubic feet)	7192.00 /-
3 P-179+195+188+18 I-38+136+92+93+93	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and 2nd floor.	83.00 Cft	54555.53	% Cft (Hundred cubic foot)	45281.00 /-
2 P-191+195 I-114+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in a square of rectangular bottom slab of over head water tank up to a height of 30 feet (9 m) above ground including form works and its removal, compacting and curing etc. complete but excluding the cost of reinforcement	101.00 Cft	59318.88	%Cft (Hundred cubic feet)	59912.00 /-
3 P-191+195 I-112+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight walls in over head water tank bins, bunkers, intze tanks and silo up to a height of 30 feet (9 m) above ground including form works and its removal, compacting and curing etc. complete but excluding the cost of reinforcement..	269.00 Cft	62314.57	%Cft (Hundred cubic feet)	167626.00 /-

4 P-192+195 I-118+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq. inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in roof slab of over head water tank up to a height of 30 feet (9 m) above ground including form works and its removal, compacting and curing etc. complete but excluding the cost of reinforcement..	112.00 Cft	53711.28	%Cft (Hundred cubic feet)	60156.00 /-
5 P-197+198+198 I-166+174+175	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in foundation, basement, plinth and ground floor of building including septic tanks and under ground tanks and in projections for future extension .	35.30 Cwt	15025.90	P.Cwt (Per hundred weight)	530671.00 /-
6 P-376+384+384 I-04+87+90	1/2" (13 mm) thick cement plaster 1:4 on walls and columns etc. in basement, plinth, mezzanine and ground floor including making edges, corners, and curing etc., complete .	826.00 Sft	5509.34	%Sft (Hundred Square foot)	45507.00 /-
7 P-423 I-141	Providing and laying gola 3" x 3" (76 mm x 76 mm) concrete 1:2:4 using graded screened bajri at junction of roof slab and walls and finished with cement plaster 1:4 including curing etc. complete.	103.00 Rft	3202.36	%Rft (Hundred running foot)	3298.00 /-
8 P-595 I-29	Providing & laying R.C.C 1:2:4 slab cover 3" thick average (precost complete with M.S flat iron, M.S bars embedded in concrete) of any shape including the cost of reinforcement and welding etc. as per direction of Engineer Incharge.	2.00 Cft	2274.73	P.Cft (Per Cubic foot)	4549.00 /-
9 P-231 I-5	Providing and laying floors of 1-1/2 inches (51 mm) thick 1:2:4 cement concrete using graded screened bajri 3/4 inch (19 mm) and down gauge in ground floor laid in panels including form work, consolidation, finishing, and curing etc. complete.	160.00 Sft	5294.08	% Sft (Hundred Square feet)	8470.00 /-
				TOTAL	**932662.0 /-**

NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH-I BUILDING				
1 .P-40 I-04	Excavation for foundation trenches and drains in wet silt clay or mud and back filling the excavated material in foundation trenches, plinth or under floor including breaking clods, watering, consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction, dressing and disposal of surplus excavated stuff as directed lead upto one chain (30.5 R.m) and lift upto 5 feet (1.52 m).	960.00 Cft	2,755.25	% Cft (Hundrd cubic feet)	26450.00 /-
2 P-52 I-13	Providing and laying 1:4:8 (1 cement 4 sand and 8 coarse aggregate) cement concrete using graded stone ballast 2 inches and down gauge in foundation including leveling, compacting and curing etc. complete.	149.00 Cft	21744.25	% Cft (Hundrd cubic feet)	32399.00 /-
3 P-173+195 I-1+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in column footing of required shape including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in foundation basement and plinth	173.00 Cft	38098.77	% Cft (Hundrd cubic feet)	65911.00 /-
4 P-173+195 I-4+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .	41.00 Cft	41920.62	% Cft (Hundrd cubic feet)	17187.00 /-
6 P-132 I-1	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls more than 13-1/2 inches (343 mm) thick including scaffolding, raking out Joints and curing etc. Complete in foundation, basement and plinth (foundation and basement masonry upto 5 feet (1.52 Ru.m.) depth and plinth upto 4 feet (1.2 Ru.m.) height from ground level) .	64.00 Cft	36129.72	% Cft (Hundrd cubic feet)	23123.00 /-
7 P-132	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9" to 13-/2 inches	176.00 Cft	38582.85	% Cft (Hundrd cubic feet)	67906.00 /-

I-2	straight or curved walls 9" to 13-/2 inches (228 mm to 343 mm) thick including Page 25 scaffolding, raking out Joints and curing etc. complete in foundation, basement and plinth (foundation and basement masonry upto 5				
8 P-174+195 I-8+136	Providing and laying reinforced cement concrete using crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs.. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in plinth beams of required shape and design including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, tn foundation basement and plinth	110.00 Cft	40365.27	%Cft (Hundrd cubic feet)	44402.00 /-
9 P-49 I-09	Supplying stacking and filling sand of approved quality from outside sources in foundation, trenches, plinth or under floor, etc. including dressing, watering and consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction and lift upto 5 feet (1 .52 m).	677.00 Cft	4869.94	% Cft (Hundred cubic feet)	32969.00 /-
10 P-231 I-02	Providing and laying 1:4:8 cement concrete bed under floors using graded stone ballast 1 inche (25 mm) and down gauge with levelling and ramming, watering and curing etc. complete..	104.00 Cft	22036.75	% Cft (Hundred cubic feet)	22918.00 /-
12 P-176+195 I-24+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .(Ground Floor)	77.00 Cft	52698.67	% Cft (Hundrd cubic feet)	40578.00 /-
14 P-179+195 I-38+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and ground floor.	183.00 Cft	47322.89	% Cft (Hundred cubic foot)	86601.00 /-
15 P-183+195 I-58+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered	14.00 Cft	57783.23	% Cft (Hundred cubic foot)	8090.00 /-

	not leaner than 1:2:4 in ordinary cantilevered slab 3 inches (76 mm) thick including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and ground floor				
16 P-135 I-25	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches (229 mm to 343 mm) thick including scaffolding, raking, out joints and curing etc. complete in ground floor superstructure .	467.00 Cft	41260.97	% Cft (Hundrd cubic feet)	192689.00 /-
18 P-182+195 I-56+136	Providing and faying reinforced cement concrete using Crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary slab 5 inches (127 mm) to 6 inches (152 mm) thick Including form work and its removal compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and ground floor	189.00 Cft	45586.77	% Cft (Hundred cubic foot)	86159.00 /-
19 P-183+195 I-60+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in ordinary cantilevered slab horizontal sun-shade or chajja tapered or straight average 5 inches (127 mm) to 6 inches (152 mm) thick including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement plinth and first floor	64.00 Cft	50456.43	% Cft (Hundred cubic foot)	32292.00 /-
20 P-197 I-166	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in foundation, basement, plinth and ground floor of building including septic tanks and under ground tanks and in projections for future extension .	25.70 Cwt	14349.01	P.Cwt (Per hundred weight)	368626.00 /-
21 P-289 I-44	Providing and fixing M.S. moulded steel door frames of 5.73" x 2-1/2" (146 mm x 63 mm) manufactured from mild steel sheet of 18 gauge (1.41 mm) conforming to B.S.S. 1245 having a double rebate size 1-1/2" x 1/2" (38 mm x 12 mm) provision of 3 Nos. M.S. plate, section 1-1/2" x 1/4" (38 mm x 6 mm) (2 Nos.	50.00 Rft	469.80	P.Rft (Per Running foot)	23490.00 /-

	6 inch long welded with frame at not less than 10 points and 1 Nos. 12 inch long welded with frame at not less than 20 points), with holes and threads for fixing steel hings, fitted with one locking box of same sheet (point welded inside the frame), 6 Nos. 6 inches long flat iron fixing lugs of 1-1/4" x 3/16" section, treated with special red oxide primer coat all around including cutting holes and filling the cavity with cement concrete 1:2:4 etc. in any floor at any height complete as directed by the Engineer-in-Charge				
22 P-376 I-02	1/4" (6.4 mm) thick cement plaster 1:4 on soffits of ceiling, cantilever slabs, sides and soffits of beams etc., in basement, mezzanine and ground floor including making edges, corners and curing etc., complete .	498.00 Sft	3852.59	% Sft Hundred Square feet)	19186.00 /-
23 P-376 I-10	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in basement, plinth, mezzanine and ground floor including making edges, corners, and curing etc., complete	2041.00 Sft	4815.26	% Sft Hundred Square feet)	98279.00 /-
24 P-302 I-100	Providing and fixing fully glazed Bronze anodized or powder coated aluminium Sliding windows as per British standard manufactured by Lucky, Prime, Chawla, Krudson, and Pakistan cable (fixing through their approved fabricators) deluxe model box section 95mm x 30mm and 1.6mm thick including the cost of aluminium netting ,fittings, with all accessories cutting hole etc. and making good damages to walls etc. complete as required in any floor as per direction of engineer-in-charge, but excluding the cost of glass pans.	102.00 Sft	1179.69	P.Sft (Per Square foot)	120328.00 /-
25 P-307 I-121	Providing and fixing Tinted glass panes 5mm thick to M.S. Box pipe / Aluminium doors, windows and ventilators etc including the cost of labour but excluding the cost of M.S. square pipe beading, rubber packing and screw in any floor at any height.	92.00 Sft	371.82	P.Sft (Per Square foot)	34207.00 /-
26 P-287 I-32	Providing and fixing iron grills with required section of flat iron as per approved design including welding all sides of the section at the junction, and fixing with sunk iron screws, painting two coats of red oxide paint etc. complete as required in any floor in masonry or concrete work.	2.50 Cwt	14777.85	P.Cwt (Per Hundred weight)	36945.00 /-
27 P-256 I-186	Providing & laying light/colour unglazed vitrified porcelain tiles (polished) exceeding 1600 Sq. cm and upto 3600 Sq cm each on walls & floors foreign make (Italian or equivalent except China make) in any floor laid with dry bond (stile bond) over on 1" thick cement mortar (1:3) including jointing the tiles with joint filler of approved qualityas per direction of the Engineer incharge.	264.00 Sft	70814.43	%Sft Hundred square foot)	186950.00 /-

28 P-242 I-82	Providing and laying floor of 6 mm (approx. 1/4 inches) thick coloured glazed tiles12" X 12" (304 mm X 304 mm) of master make Pakistani first grade in ground floor in ground floor laid over 1 inch (25 mm) thick cement mortar base 1:2 (one cement 2 sand) including jointing and washing the tiles with white cement slurry of matching colour (by using pigment in white cement) and curing etc. complete.	78.00 Sft	30212.46	%Sft Hundred square foot)	23566.00 /-
29 P-266 I-47	Providing and fixing 1/4"(6mm approx.) thick of Pakistani make first grade coloured glazed tiles upto 144 Sq inch size in dado and skirting in ground floor over 1/2" (13mm) thick base of cement mortar 1:3 setting of tiles in slurry of grey cement over mortar base including filling the joint with white cement slurry to matching the colour and washing the tile, curing and cleaning etc. complete	180.00 Sft	26546.93	%Sft Hundred square foot)	47784.00 /-
32 P-313 I-22	Providing and fixing 1-1/2 inch (38 mm) thick best quality deodar wood shutters fully panelled with same wood, approved iron hinges and tower bolts, etc., as required..	57.00 Sft	1651.66	P.Sft (Per Square foot)	94145.00 /-
33 P-364 I-160	Providing and fixing approved brass handles 5" (127 mm) size heavy type with becessary brass screws .	3.00 Nos	357.74	Each	1073.00 /-
34 P-358 I-77	Providing and fixing with brass screws Alpha knob set bath latch of approved design No. 8000, Japan make, cutting wood to required shape and size with two operating keys as per direction of the engineer-in-Charge	3.00 Nos	4274.38	Each	12823.00 /-
35 P-357 I-70	Providing and fixing with brass screws or specially supplied screws hydraulic door closer Rayobi or approved design No. 72, Japan make, cutting wood etc., to required shape and size as per direction of engineer-in-charge .	1.00 Nos	9331.25	Each (Each)	9331.00 /-
36 P-82 I-25	Providing and laying 1:9 cement concrete using screened graded bajri 3/4 inch and down gauge In terracing 3 inches average thickness to required slope in panels including form work, consolidation, finishing, curing etc. and painting the surface with plastic bitumen No. 4 at the rate of 15 Ibs per hundred square feet (0.73 Kg per s.m) blinded with sand at the rate of 2 cubic feet per hundred square feet (0.06 Kg per s.m) complete" on ground floor roof.	506.00 Sft	8229.59	% Sft Hundred Square feet)	41642.00 /-
37 P-389 I-151	Distempering with vinyle distemper (ICI) Dulux Paintex of approved make and shade in two coats over and including the cost of one priming coat of lime wash including sand papering, dusting, and filling the holes, cracks and inequalities, if any, at any height in any floor.	1446.00 Sft	3401.25	% Sft Hundred Square feet)	49182.00 /-

38 P-390 I-172	Painting three coats with weather shield paint deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	1093.00 Sft	4408.75	% Sft Hundred Square feet)	48188.00 /-
39 P-389 I-160	Painting wood work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	142.00 Sft	5954.86	% Sft Hundred Square feet)	8456.00 /-
40 P-389 I-159	Painting Iron work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	70.00 Sft	6071.25	% Sft Hundred Square feet)	4250.00 /-

TOTAL	**2008125 /-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

PROVINCE :- **SINDH**

BRANCH :- **B/R**

NAME OF WORK :- **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	S.H.II- W/S & S/I				
1 P-553 I-03	Providing and fixing best quality squatting type white glazed earthenware W.C Pan, Pakistani (of not less than 18 Inches clear opening as measured between flushing rims) complete with and including the cost of 13.6 litre best quality low level plastic flushing cistern with internal fittings complete, P.V.C. flushing pipe suitable for squatting type with extra bends and length with fittings, C.I. trap 4 inches (100mm) dia and making requisite number of holes in walls, plinth & floor for pipe connection and making good in cement concrete 1:2:4..	6 No.	13602.50	Each	81615.00 /-
2 P-553 I-05	Providing and fixing best quality squatting type white glazed earthenware W.C Pan, Pakistani (of not less than 18 Inches clear opening as measured between flushing rims) complete with and including the cost of 13.6 litre best quality low level plastic flushing cistern with internal fittings complete, P.V.C. flushing pipe suitable for squatting type with extra bends and length with fittings, C.I. trap 4 inches (100mm) dia and making requisite number of holes in walls, plinth & floor for pipe connection and making good in cement concrete 1:2:4..	6 No.	14312.50	Each	85875.00 /-
3 P-554 I-09	Providing and fixing 22 inches x 16 inches (560 x 406 mm) lavatory basin in white glazed earthenware (Pakistani) complete with and including the cost of Brass oxidized bolts kit built into walls 1/2 inches (15 mm) dia. Chrome plated mixer, 1-1/4 inches (32 mm) rubber plug and chrome plated brass chain 1-1/4 inches (32 mm) dia brass waste of approved pattern 1-1/4 inches (32 mm) dia chromium plated battal trap with unions and making requisite, number of holes in walls, plinth and floor for pip.e connections and making good in cement concrete 1:2:4..	12 No.	12262.50	Each	147150.00 /-
4 P-557 I-10	Providing and fixing bath room accessories of set of 7 pieces consist of one cosmatic shelf, one towel rod with bracket, one soap dish, one tooth brush holder with glass and cover, one tissue paper holder one double hook one towel ring etc complete of approved quality as per direction of Engineer in-charge.	8 No.	12062.50	Each	96500.00 /-
5 P-556 I-30	Providing and Fixing UPVC Multi floor trape of sizes with gratings including cutting and making the requiste number of holes in walls,plinth and floors and making good in 1:2:4 C.C.	66 Nos	1459.43	Each	96322.00 /-
6 P-570 I-02	Providing and fixing ¾" inches dia brass bib	12 Nos.	1130.40	Each	13565.00 /-

7 P-558 I-13	Providing & fixing chromium plated Muslim bib-cock with out Muslim Shower of approved quality.	12 Nos	3381.75		40581.00
8 P-75 I-04	Providing and fixing ¾" inches dia brass stop cocks.	24 Nos.	1230.40	Each	29530.00 /-
9 P-567 I-29	Providing and fixing PPRC pipe PN-20 with specials, and clamps etc, including cutting and fitting complete with and including the cost of breaking through walls and roof and making good etc after cleaning the pipe and cartage within 10 miles 20 mm dia.	630 Rft	153.45	P.Rft Per Running foot)	96674.00 /-
10 P-567 I-30	Providing and fixinf PPRC pipe PN-20 with specials, and clamps etc, including cutting and fitting complete with and including the cost of breaking through walls and roof and making good, after cleaning the pipe and cartage within 10 miles 25 mm dia.	200 Rft	215.32	P.Rft Per Running foot)	43064.00 /-
11 P-566 I-17	Providing and Fixng un plastisized polyvinyl chloride (UPVC) "E" classwith specals) and clamps etc, including cutting and fitting, complete with and including the cost of breaking through walls and roof and making good etc, after cleaning the pipe and cartage within 10 miles (16.09 km) (working Pressure 12 kg/cm2) 3/4" (20 mm) dia	260 Rft	520.97	P.Rft Per Running foot)	135452.00 /-
P-566 I-17	(B) Same item but 4" dia	150 Rft	719.12	P.Rft (Per Running foot)	107981.00 /-
12 P-567 I-28	Providing and fixing un platisized polyvinyl chloride pipe (P.V.C) "D" class and specials etc. including cutting and fitting complete with and including the cost of cutting trench upto 1-1/2 feet deep refilling, watering, ramming, and disposal of surplus earth within one chain and after cleaning the pipe and cartage within 10 miles (16.09 km.) (working pressure 12 kg/cm2) 8 inches (200 mm) dia pipe.	380 Rft	998.82	P.Rft Per Running foot)	379552.00 /-
13 P-592 I-13	Providing manhole type 'A' size 2 feet x 1-1/2 feet or 610 mm x 457 mm(inside dimensions) x 2 feet (610 mm) deep as per approved design and specifications complete for 4 inches to 12 inches (100 mm to 305 mm) dia. Pipes upto 3 feet-11 inches (1.19 m) depth with 16 inches (406 mm dia.) (inside) cast iron cover and frame (weight = 1 Cwt. 1. Qtr.) (63.5 kg.) fixed in R.C.C.1:2:4 slab 4 inches (102 mm)(thick, burnt brick masonry walls 9 inches (229 mm) thick set in 1:4 cement mortar, 6 inches (150 mm) 1:3:6 C.C. in foundation, 1:2:4 C.C. in benching and 1/2 inch (13 mm) thick cement plaster in 1:3 C.M., to all inside walls surfaces channels and benching etc., and to top including making requisite number of main and branches channels but excluding the cost of excavation, back filling and disposal of excavated stuff, manhole cover and frame.	4 Nos	13411.31	Each	53645.00 /-

14 P-593 I-15	Providing manhole type 'B' size 3 feet x 2-1/2 feet or 914 mm x 762 mm(inside dimensions) x 4 feet (1219 mm) deep as per approved design and specifications complete for 4 inches to 12 inches (100 mm to 305 mm) dia. Pipes upto 3 feet-11 inches (1.19 m) depth with 16 inches (406 mm dia.) (inside) cast iron cover and frame (weight = 1 Cwt. 1. Qtr.) (63.5 kg.) fixed in R.C.C.1:2:4 slab 4 inches (102 mm)(thick, burnt brick masonry walls 9 inches (229 mm) thick set in 1:4 cement mortar, 6 inches (150 mm) 1:3:6 C.C. in foundation, 1:2:4 C.C. in benching and 1/2 inch (13 mm) thick cement plaster in 1:3 C.M., to all inside walls surfaces channels and benching etc., and to top including making requisite number of main and branches channels but excluding the cost of excavation, back filling and disposal of excavated stuff, manhole cover and frame.	2 Nos	31974.81	Each	63950.00 /-
15 P-56 I-19	Providing and fixing M.S. clamps of the approved design to 3 inches (80mm) dia C.I. pipe sockets including the cost of cutting and making good to wall or M.S. Bolts and nuts built 3 inches (80mm) into walls including pipe distance pieces and extra painting to match the colour of the building and cartage within 10 miles. (16.09 Km) (for Spun pipe).	52 Nos	390.85	Each	20324.00 /-
16 P-560 I-2	Providing and fixing M.S. clamps of the approved design to 4 inches (100 mm) dia C.I. pipe spun sockets including the cost of cutting and making good to wall or M.S. bolts and nuts built. 4 inches (100 mm) in to wall including pipe distance pieces, extra painting to match the colour of the building and cartage within 10 miles. (16.09 km.)..	37 Nos	415.85	Each	15386.00 /-
	(B) F.F	28 Nos	415.85	Each	11644.00 /-
17 P-570 I-08	Providing and fixing 1/2 inches (15 mm) dia full way gun metal valves with wheels threaded or flanged ends with rubber washers, (standard pattern)..3/4" dia	5 Nos	2017.90	Each	10090.00 /-
P-570 I-09	(B) 1" dia	2 Nos	2017.90	Each	4036.00 /-
18 P-572 I-29	Providing and fixing gun-metal non-return valves with male and female ends as required. 1" inche (25 mm) dia..	1 Nos	2069.10	Each	2069.00 /-
19 P- I-23	Providing and fixing approved quality stainless steel sink 33” x 18” Pak made (Atlas) complete with brass oxidized bolt kit/angle iron brackets built into walls ½” dia CP sink mixer 1-1/4” rubber plug and CP brass chain 1-1/4” CP brass waste 1-1/4” dia malleable iron or CP brass bottle trap with malleable iron or brass unions and making requisite number of holes in walls, plinth and floor for pipe connections and making good in cement concrete 1:2:4	1 Nos	16495.00	Each	16495.00 /-
				TOTAL	**1551500 /-**

NAME OF WORK **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH- COMPOUND WALL				
1 .P-40 I-04	Excavation for foundation trenches and drains in wet silt clay or mud and back filling the excavated material in foundation trenches, plinth or under floor including breaking clods, watering, consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction, dressing and disposal of surplus excavated stuff as directed lead upto one chain (30.5 R.m) and lift upto 5 feet (1.52 m)	10490.00 Cft	2,755.25	% Cft (Hundrd cubic feet)	289026 /-
2 P-52 I-13	Providing and laying 1:4:8 (1 cement 4 sand and 8 coarse aggregate) cement concrete using graded stone ballast 2 inches and down gauge in foundation including leveling, compacting and curing etc. complete.	1450.00 Cft	21744.25	% Cft (Hundrd cubic feet)	315292 /-
3 P-173+195 I-1+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in column footing of required shape including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in foundation basement and plinth	2165.00 Cft	38098.77	% Cft (Hundrd cubic feet)	824838 /-
4 P-173+195 I-4+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth .	480.00 Cft	41920.62	% Cft (Hundrd cubic feet)	201219 /-
5 P-132 I-1	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls more than 13-1/2 inches (343 mm) thick including scaffolding, raking out Joints and curing etc. Complete in foundation, basement and plinth (foundation and basement masonry upto 5 feet (1.52 Ru.m.) depth and plinth upto 4 feet (1.2 Ru.m.) height from ground level) .	1183.00 Cft	36129.72	% Cft (Hundrd cubic feet)	427415 /-
6 P-132 I-02	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9" to 13-/2 inches thick including scaffolding, raking out Joints and curing etc. complete in foundation, basement and plinth (foundation and basement masonry up to 5 feet depth and plinth up to 4 feet height from ground level) .	1973.00 Cft	38582.85	% Cft (Hundrd cubic feet)	761240 /-

7 P-174+195 I-8+136	Providing and laying reinforced cement concrete using crushed graded boulders 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs.. per sq inch (20.69 N/mm2) at 28 days with a mix not leaner than 1:2:4 in plinth beams of required shape and design including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, tn foundation basement and plinth	940.00 Cft	40365.27	%Cft (Hundrd cubic feet)	379434 /-
8 P-135+136 I-25+33	Providing and laying first class solid burnt brick masonry set in cement mortar 1:6 in straight or curved walls 9 to 13-1/2 inches thick including scaffolding, raking, out joints and curing etc. complete in ground floor superstructure .(Extra for pillar & columns of rectangular or square shape).	3513.00 Cft	51870.35	% Cft (Hundred cubic feet)	1822205 /-
9 P-176+195 I-24+136	Providing and laying reinforced cement concrete using crushed graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 3000 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in columns of square or rectangular shape of regular section including form work and its removal, compacting and curing etc. but excluding the cost of reinforcement, in foundation basement and plinth	708.00 Cft	52698.67	% Cft (Hundred cubic feet)	373107 /-
10 P-179+195 I-38+136	Providing and laying reinforced cement concrete using screened graded bajri 3/4 inch (19 mm) and down gauge having a minimum works cube crushing strength of 2250 Ibs. per sq inch (15.52 N/mm2) at 28 days with a mix not leaner than 1:2:4 in straight beams, lintels cantilever beams of required shape or section including form work and its removal, compacting and curing etc. complete but excluding the cost of reinforcement, in basement and ground floor.	603.00 Cft	47322.89	% Cft (Hundred cubic foot)	285357 /-
11 P-197 I-166	Providing and laying hard grade ribbed deformed (minimum yield point 60,000 psi) reinforcement bars with & including the cost of straightening, cutting, bending, binding, wastage, and such overlaps as are not shown in the drawings, placing in position on cement concrete 1:2:4 precast or m.s. chairs, tying with binding wire, cost of chairs and wires etc. in all kinds of RCC work in foundation, basement, plinth and ground floor of building including septic tanks and under ground tanks and in projections for future extension .	191.50 Cwt	14349.01	P.Cwt (Per hundred weight)	2746689 /-
12 P-285 I-18	Providing and fixing steel gate of flat iron sections of approved design with or without M.S. sheet covering including hold fast, with or without rollers and track arrangement including providing wicket shutter of required size with all accessories and locking arrangement complete as per direction of the Engineer-in-Charge.	19.90 Cwt	17600.13	P.Cwt (Per hundred weight)	350243 /-
13 P-376 I-10	3/4" (19 mm) thick cement plaster 1:6 on walls and columns etc. in basement, plinth, mezzanine and ground floor including making edges, corners, and curing etc., complete	20179.00 Sft	4815.26	% Sft (Hundred Square feet)	971671 /-

14 P-269 I-88	Providing & Fixing Machine made Guttca brick tiles facing 1-1/2" to 2" thick in cement marter 1:3 cement pointed in deep cut grooves and in any pattern as per direction of the Engineer including in any floor in any hight.	144.00 Sft	29713.48	% Sft (Hundred Square feet)	42787 /-
15 P-390 I-172	Painting three coats with weather shield paint deluxe (ICI) make of approved shade on plaster surface (External) and including the cost of cleaning the surface, sand papering etc. complete at any height in any floor.	20179.00 Sft	4408.75	% Sft (Hundred Square feet)	889642 /-
16 P-389 I-159	Painting iron work with synthetic enamel paint of approved make and shade two coats over and including the cost of one priming coat complete at any height in any floor .	512.00 Sft	6071.25	% Sft (Hundred Square feet)	31085 /-
				TOTAL	**10711250 /-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

PROVINCE :- **SINDH**
BRANCH :- **B/R**
NAME OF WORK :- **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER**

Page & Item No.	Name of Description	Qty:	Rate	Unit	Amount
	S.H.Parking Shed				
1 .P-429 I-204	Fabrication and fixing of the Fiber shed consisting of 5-Ply fiber sheet and 2"x2" M.S. Box pipe 16 guage main frame beams and central bracing 2"x2" at 24" c/c diagonal and 2"x2" support upto 2 feet c/c over 4" dia M.S. pipe 16 guage 10-14 feet heigh i/c the cost of excavation , with pcc 1:2:4 and rcc with steel and MS steel plate 1/2" thick in foundation , size 2'x2' cutting fitting, welding paiting etc. complete as per direction of engineer incharge.	1100 Sft	1,075.00	P.Sft (Per Square feet)	1182500.00 /-
				TOTAL	**1182500 /-**

Assistant Executive Engineer-III
Central Civil Division
Pakistan PWD, Hyderabad

Executive Engineer
Central Civil Division
Pakistan PWD, Hyderabad

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

PROVINCE: **SINDH**
BRANCH: **B/R**
NAME OF WORK: **CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.**

Page No.& Item No.	Name of Description	Qty:	Rate	Unit	Amount
	SH- Earth Filling (outer side of building)				
1 P-49 I-09 `	Supplying stacking and filling sand /murum of approved quality from outside sources in foundation, trenches, plinth or under floor, etc. including dressing, watering and consolidation by ramming in layers not exceeding 9 inches (229 mm) in depth to full compaction and lift upto 5 feet (1 .52 m).	39010.00 Cft	4869.94	% Cft (Hundred cubic feet)	1899764 /-
2 P-231 I-02	Providing and laying 1:4:8 cement concrete bed under floors using graded stone ballast 1 inche (25 mm) and down gauge with levelling and ramming, watering and curing etc. complete..	1209.00 Cft	22036.75	% Cft (Hundred cubic feet)	266424 **/-**
3 P-231 I-07	Providing and laying floors of 3 inches (76 mm) thick 1:2:4 cement concrete using graded screened bajri 3/4 inch (19 mm) and down gauge in ground floor laid in panels including form work, consolidation, finishing and curing etc. complete.	835.00 Sft	9562.54	% Cft (Hundred cubic feet)	79720
4 P-255 I-177 (A)	Providing and laying in floor C.C. 1:2:4: tuff paver 2-1/2" thick (Envi-crete, Megna-crete. Nazeer-crete, Banu Mukhtar or equavalent on the approval of Engineer Incharge) of approved design and colour pattren laid on sand cushion filling of joint with sand and warring etc. complete as per direction of Engineer Incharge. (the cost of sand cushion is included)	4000.00 Sft	135.13	P.Sft (Per Square foot)	540520 **/-**
				TOTAL	**2786428 /-**

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS

Providing and fixing electric accessories at I.B Office Mithi					
S.No.	**Item**	**Qty**	**Rate**	**Unit**	**Amount**
1	Wiring for light or fan point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as (required Item 102)	190	6,573	No's	1,248,870
2	Wiring for plug point with 7/.036 PVC insulated wire in 20mm (3/4") PVC conduit recessed in the wall or column as required	40	7,860	No's	314,400
3	Wiring for call bell point with 3/.029 PVC insulated wire in 20mm (3/4") PVC conduit on surface as reuqierd (Item 105)	2	6,332	No's	12,664
4	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 3-core7/.036 (4mm)copper conductor in ¾" Dia PVC conduit recessed in the wall or column as required. (Item 25)	107	934	R/Ft	99,938
5	Providing & laying (MAIN or SUB MAIN) PVC insulated with size 3-7/.044 (6mm2) copper conductor in 1" Dia PVC conduit recessed in the wall or column as required. Providing & laying (MAIN or SUB MAIN)(Item 26)	26	1,370	R/Ft	35,620


6	Providing, supplying, installing, testing and commissioning of 15 Amps, 250V AC, single-phase, switched power socket outlet, modular/flush-mounted type, manufactured from high-quality flame-retardant polycarbonate/engineering plastic, complete with suitable plug, shuttered contacts, brass/copper alloy terminals, face plate, mounting frame, flush metal/PVC back box, screws, connectors and all necessary accessories.complete in all respect as per instruction of Engineer Incharge	10	1,800		18,000
7	Providing & laying PVC insulated with size 1-Core (4mm2) copper conductor Green color for Earthing	52	180	R/Ft	9,360
8	Providing & laying (MAIN or SUB MAIN) PVC insulated & PVC sheeted with 4 core copper conductor 600/1000 volts size 35mm2(Item 82)	40	3,242	R/Ft	129,680
9	Supply & Installation of Ceiling Recessed LED Panel Light 40W (600X600) with Light Fixture Frame arrangement Complete in all respects.as per site requirement and instruction of engineer in charges	55	9,788	No's	538,340
10	Supply & Installation of Ceiling Recessed LED Panel Light 24W (Round Shape) with Built-in Driver with Light Fixture Frame arrangement .Complete in all respects.as per site requirement and instruction of engineer in charges	20	2,300	No's	46,000


11	Providing, supplying, installing, testing and commissioning of 2×2 ft (600×600 mm) false ceiling mounted fan unit, suitable for installation in a standard 600×600 mm modular false ceiling grid, complete with high-efficiency motor,decorative grille/panel, mounting/support arrangement, capacitor, electrical connections and all necessary accessories.The fan shall be properly supported independently from the false ceiling grid and shall be complete in all respects and instruction of engineer in charges	46	16,300	No's	749,800
12	Providing & fixing 10 Amps Polycarbonate flame retardant S.P switch with fancy “Ivory” gang plate fixed on die fabricated, powder coated, metal board recessed in the wall or column including connection as required.Complete in all respects.as per site requirement and instruction of engineer in charges	160	389	No's	62,240
13	P/F LED Flood Lights 50W/175-220V P.F 0.95 for front Elevation .Complete in all respects.as per site requirement and instruction of engineer in charges	5	35,400	Nos.	177,000
14	P/L Earthing set 600*600*6mm copper plate buried in ground at depth of 12’ or less depth if water comes out with salt and coal I/c making pits 12’. Depth by excavation in all kind of soil I/c hard and soft rock refilling the excavation with 8n bare copper wire run in G.I pipe straight from earth plate with metallic accessories complete in all respect as per instruction of Engineer Incharge. Less than 5 Ohm.	3	76,296	Nos.	228,888

15	P/F Bracket Fan 16" 220V/50HZ Make: Pak fan,GFC,Royal fan or equivalent for security Room complete in all respect as per instruction of Engineer Incharge.	4	13,200	Nos.	52,800
					3,723,600

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS



Proposed Site IB Office Mithi
Police Headquarter
Mithi Hotipada
Imagery Date: 5/27/2024
24°45'13.38" N 69°47'38.57" E elev 143 ft eye alt 2711 ft
Google Earth

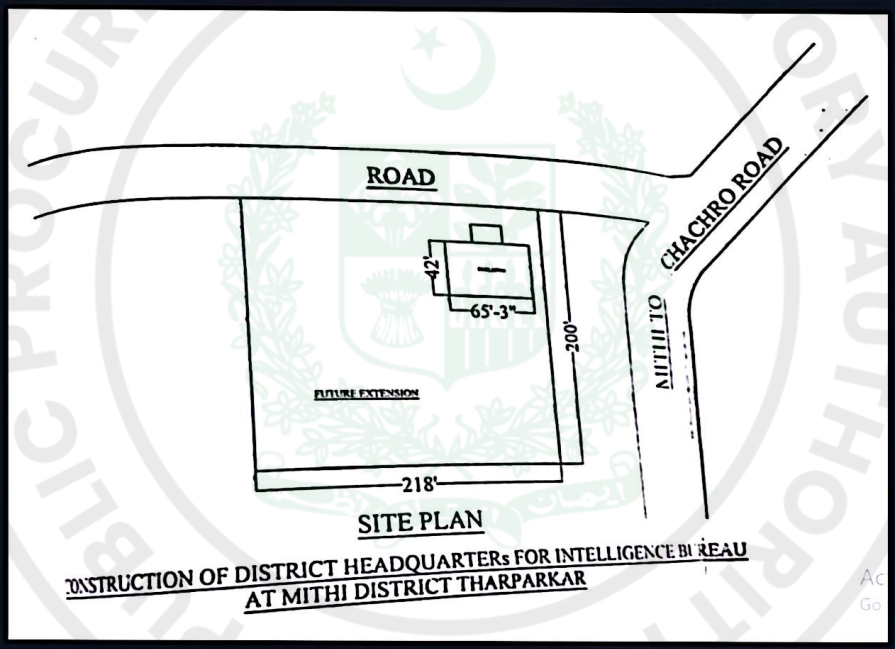
ROAD
CHACHRO ROAD
MITHI TO
42'
65'-3"
200'
FUTURE EXTENSION
218'
SITE PLAN
CONSTRUCTION OF DISTRICT HEADQUARTERs FOR INTELLIGENCE BUREAU
AT MITHI DISTRICT THARPARKAR

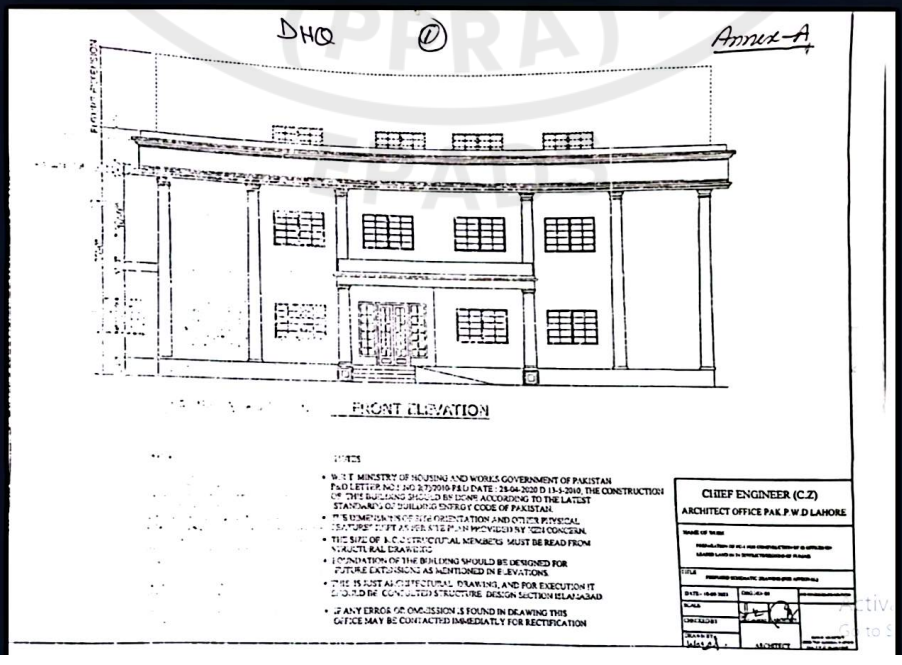
DHQ
Annex-A
FRONT ELEVATION
CHIEF ENGINEER (C.Z)
ARCHITECT OFFICE PAK P W D LAHORE

DHQ ①

Annex-A

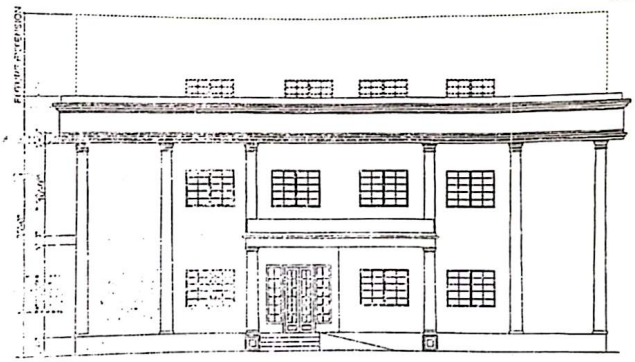

FRONT ELEVATION


NOTES

- W.R.T. MINISTRY OF HOUSING AND WORKS GOVERNMENT OF PAKISTAN P&D LETTER NO.1 NO.2(7)2019-P&D DATE : 28-04-2020 D 13-5-2010, THE CONSTRUCTION OF THIS BUILDING SHOULD BE DONE ACCORDING TO THE LATEST STANDARDS OF BUILDING ENERGY CODE OF PAKISTAN.
- THE DIMENSIONS OF SITE ORIENTATION AND OTHER PHYSICAL FEATURES KEPT AS PER SITE PLAN PROVIDED BY XEN CONCERN.
- THE SIZE OF R.C.C STRUCTURAL MEMBERS MUST BE READ FROM STRUCTURAL DRAWINGS
- FOUNDATION OF THE BUILDING SHOULD BE DESIGNED FOR FUTURE EXTENSIONS AS MENTIONED IN ELEVATIONS.
- THIS IS JUST ARCHITECTURAL DRAWING, AND FOR EXECUTION IT SHOULD BE CONSULTED STRUCTURE DESIGN SECTION ISLAMABAD
- IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONTACTED IMMEDIATLY FOR RECTIFICATION


CHIEF ENGINEER (C.Z)
ARCHITECT OFFICE PAK.P.W.D LAHORE

DHQ ②


STATEMENT OF AREA

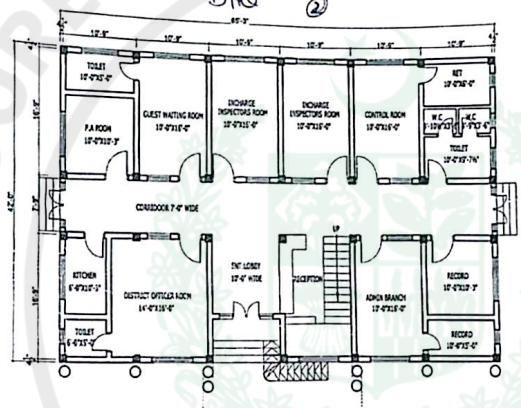

GROUND FLOOR PLAN



GROUND FLOOR PLAN (DRIVERS ROOM)



ELEVATION



OBSERVATION POST PLAN



ELEVATION




SECURITY PICKET AT MAIN GATE PLAN

NOTES


- W.R.T. MINISTRY OF HOUSING AND WORKS GOVERNMENT OF PAKISTAN P&D LETTER NO.1 NO.2(7)2019-P&D DATE : 28-04-2020 D 13-5-2010, THE CONSTRUCTION OF THIS BUILDING SHOULD BE DONE ACCORDING TO THE LATEST STANDARDS OF BUILDING ENERGY CODE OF PAKISTAN.
- THE DIMENSIONS OF SITE ORIENTATION AND OTHER PHYSICAL FEATURES KEPT AS PER SITE PLAN PROVIDED BY XEN CONCERN
- THE SIZE OF R.C.C STRUCTURAL MEMBERS MUST BE READ FROM STRUCTURAL DRAWINGS
- FOUNDATION OF THE BUILDING SHOULD BE DESIGNED FOR FUTURE EXTENSIONS AS MENTIONED IN ELEVATIONS
- THIS IS JUST ARCHITECTURAL DRAWING, AND FOR EXECUTION IT SHOULD BE CONSULTED STRUCTURE DESIGN SECTION ISLAMABAD
- IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONTACTED IMMEDIATLY FOR RECTIFICATION

CHIEF ENGINEER (C.Z)
ARCHITECT OFFICE PAK.P.W.D LAHORE

DHQ ③

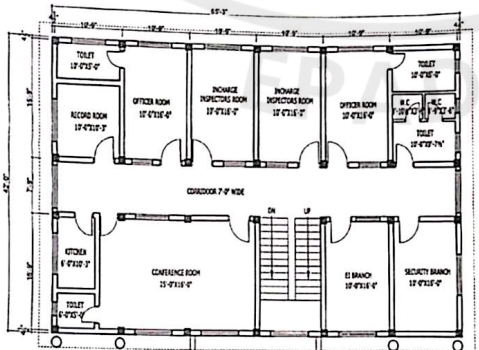

FIRST FLOOR PLAN



MUMTY PLAN

NOTES

- W.R.T. MINISTRY OF HOUSING AND WORKS GOVERNMENT OF PAKISTAN P&D LETTER NO.1 NO.2(7)2019-P&D DATE : 28-04-2020 D 13-5-2010, THE CONSTRUCTION OF THIS BUILDING SHOULD BE DONE ACCORDING TO THE LATEST STANDARDS OF BUILDING ENERGY CODE OF PAKISTAN.
- THE DIMENSIONS OF SITE ORIENTATION AND OTHER PHYSICAL FEATURES KEPT AS PER SITE PLAN PROVIDED BY XEN CONCERN
- THE SIZE OF R.C.C STRUCTURAL MEMBERS MUST BE READ FROM STRUCTURAL DRAWINGS
- FOUNDATION OF THE BUILDING SHOULD BE DESIGNED FOR FUTURE EXTENSIONS AS MENTIONED IN ELEVATIONS
- THIS IS JUST ARCHITECTURAL DRAWING, AND FOR EXECUTION IT SHOULD BE CONSULTED STRUCTURE DESIGN SECTION ISLAMABAD
- IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONTACTED IMMEDIATLY FOR RECTIFICATION

CHIEF ENGINEER (C.Z)
ARCHITECT OFFICE PAK.P.W.D LAHORE

CamScanner

BD-2
Appendix-D to Bid

Name of Work:

CONSTRUCTION OF DISTRICT HEADQUARTER FOR INTELLIGENCE BUREAU AT MITHI DISTRICT THARPARKER.

SCHEDULE OF PRICES

Description	%	Amount
SH-I:BUILDING		
SH-II:BUILDING FF		
SH-III Second Floor (including Security Post)		
SH-IV Parapet Wall		
SH-V UGT		
SH-VI OHT		
SH-VII Guard Room & Driver room		
SH-VIII W/S & S/I		
SH-IX Compound Wall		
SH-X Parking Shed		
SH-XI Earth Filling (outer side of building)		
SH-XII SOIL INVESTIGATION		
SH-XIII Electrification / Gas (Internal / External) & Allied works		
TOTAL		**Rs. 62,687,190/-**
To be filled by the Bidder		
	Above /Below	
SH-I:BUILDING		
SH-II:BUILDING FF		
SH-III Second Floor (including Security Post)		
SH-IV Parapet Wall		
SH-V UGT		
SH-VI OHT		

SH-VII Guard Room & Driver room		
SH-VIII W/S & S/I		
SH-IX Compound Wall		
SH-X Parking Shed		
SH-XI Earth Filling (outer side of building)		
SH-XII SOIL INVESTIGATION		
SH-XIII Electrification / Gas (Internal / External) & Allied works		
TOTAL		

Total Bid Price (The amount to be entered in Paragraph 1 of the Form of Bid).(In Rupees _____)

GENERAL MANAGER ENGINEERING
PAKISTAN INFRASTRUCTURE DEVELOPMENT COMPANY LIMITED (PIDCL)

(Signature & Stamp)

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA) EPADS